

APP CRS
234°

Rwy Idg 10000
TDZE 409
Apt Elev 435

RNAV (RNP) Z RWY 23R
RALEIGH-DURHAM INTL (RDU)



RNP AR APCH-GPS.

For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C.
For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500, increase RNP 0.30 all Cats visibility to 1½ SM. Simultaneous approach authorized except for arrivals at GLEYS.

ALSF-2

MISSED APPROACH: Climb to 1000 then climbing right turn to 2200 direct DUHAM and hold.

D-ATIS	RALEIGH APP CON	(EAST) RALEIGH TOWER (WEST)	(EAST) GND CON (WEST)	CLNC DEL	CPDLC
123.8	127.675 307.9	127.45 257.8 Rwys 5R-23L and 14-32	119.3 257.8 Rwy 5L-23R	121.9 348.6 Rwys 5R-23L and 14-32	121.7 348.6 Rwy 5L-23R
				120.1	

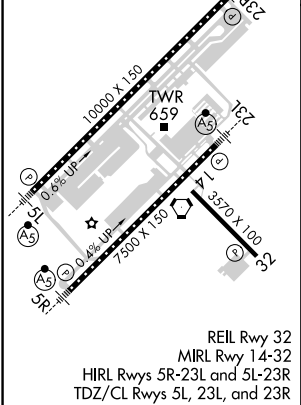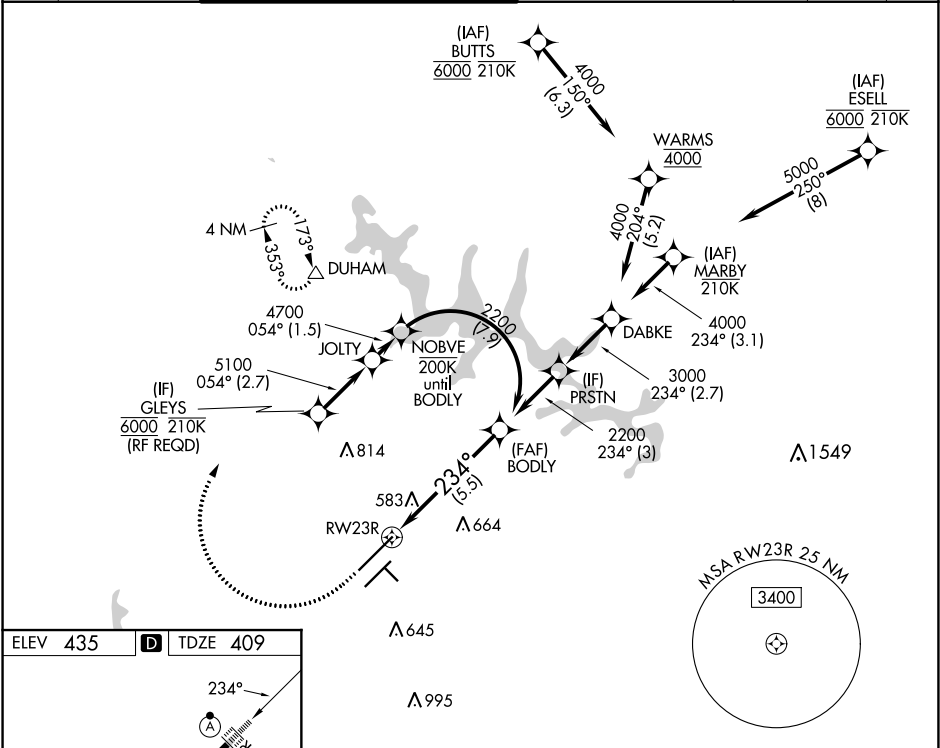

1000 2200 DUHAM

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 69°).

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.15 DA		760/30 351 (400-½)		
RNP 0.30 DA		910/55 501 (500-1)		

AUTHORIZATION REQUIRED