

LOC I-OXK 109.9	APP CRS 139°	Rwy Idg 8006 TDZE 459 Apt Elev 459
---------------------------	------------------------	---

ILS or LOC RWY 14R



SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

ASR For inop ALS, increase S-ILS 14R Cat E visibility to RVR 4000 and S-LOC 14R Cat E visibility to 1 1/4 mile. DME from SKE TACAN. **RVR 1800 authorized with use of FD or AP or HUD to DA.

ALSIF-1

MISSED APPROACH: Climb to 2200 then on TOY VORTAC R-148 to WOMUG INT and hold.

ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 225.4 263.025
------------------------------	--	------------------------------------	-------------------------------	--

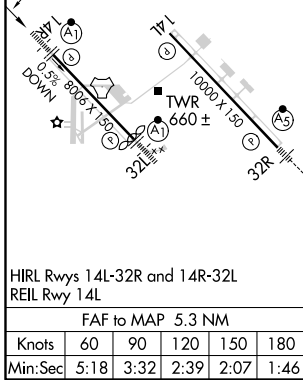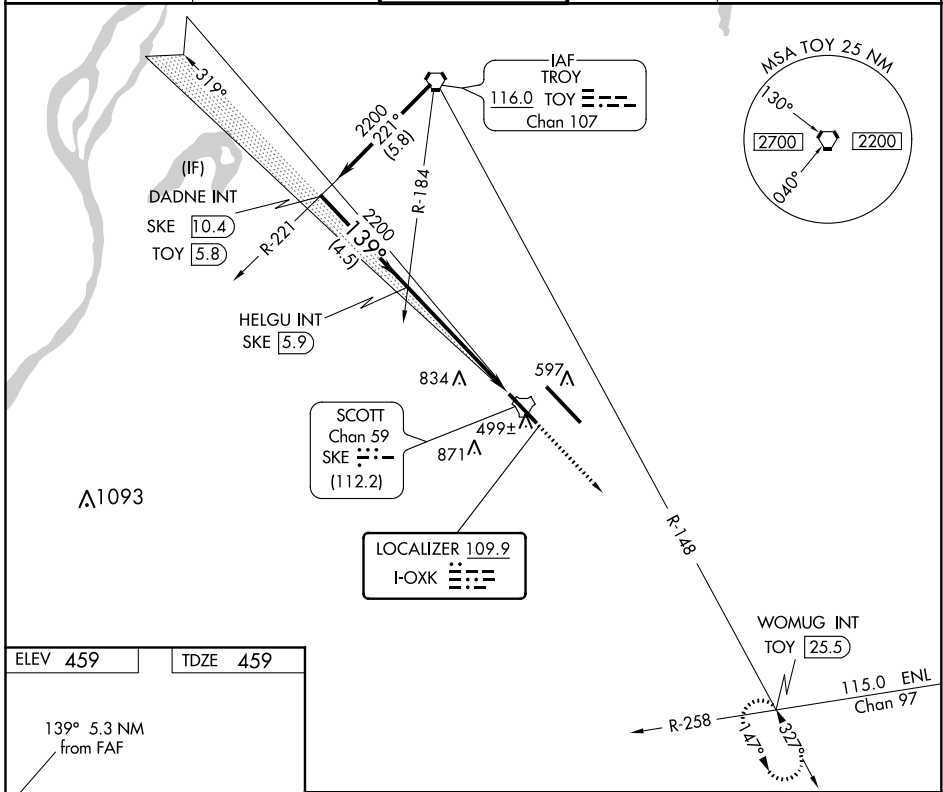

DADNE INT SKE 10.4	HELGU INT SKE 5.9	2200	TOY R-148	WOMUG INT	2200
GS 3.00°		TCH 51			
4.5 NM		5.3 NM			
CATEGORY	A	B	C	D	E
S-ILS 14R**	659/24 200 (200-1/2)				
S-LOC 14R	1040/24 581 (600-1/2)		1040-1 1/4 581 (600-1 1/4)		
C CIRCLING	1040-1 581 (600-1)	1080-1 621 (700-1)	1240-2 1/4 781 (800-2 1/4)	1240-2 1/2 781 (800-2 1/2)	1240-2 3/4 781 (800-2 3/4)

EC-3, 09 SEP 2021 to 07 OCT 2021

EC-3, 09 SEP 2021 to 07 OCT 2021