

WAAS CH 50515 W32A	APP CRS 313°	Rwy Idg TDZE Apt Elev	3600 1608 1608
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32

ROBERTSON FLD (D55)

▼

⚠


❄

-35°C

Baro-VNAV NA when using Devils Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received use Devils Lake altimeter setting and increase all DA 122 feet and all MDA 140 feet, increase LPV all Cats, LNAV and Circling Cat B visibility ¼ mile and LNAV/VNAV all Cats, LNAV and Circling Cat C visibility ½ mile.

MISSED APPROACH: Climb to 4000 direct MEKSE and via track 223° to JAKTI and via track 132° to CIDVA and hold.

AWOS-3 118.225	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) ❶
--------------------------	---	---------------------------------

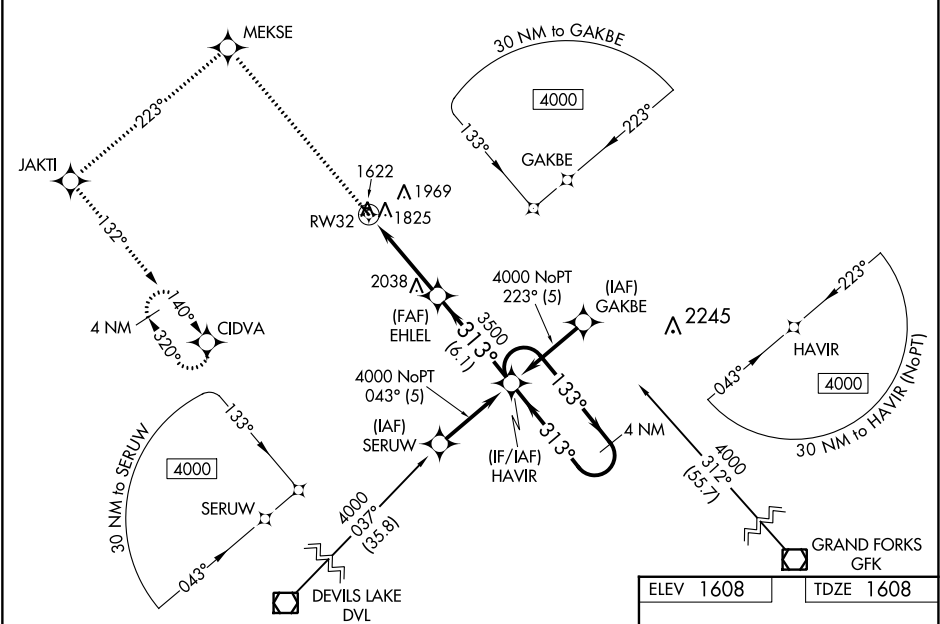

4000

↑

MEKSE

✧

tr 223°

✧

JAKTI

✧

tr 132°

✧

CIDVA

✧

HA VIR

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 27).

EHLEL

✧

3500

313°

133°

4000

313°

RW32

5.7 NM

6.1 NM

GP 3.00° TCH 40

CATEGORY	A	B	C	D
LPV DA	1858-1 250 (300-1)			NA
LNAV/VNAV DA	2159-2 551 (600-2)			NA
LNAV MDA	2340-1 732 (800-1)	2340-2 732 (800-2)		NA
CIRCLING	2340-1 732 (800-1)	2340-2 732 (800-2)		NA

