

WAAS CH 70319 W24A	APP CRS 238°	Rwy Idg 12000 TDZE 30 Apt Elev 30
--	------------------------	--

RNAV (GPS) RWY 24


SOUTHWEST FLORIDA INTL (RSW)

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2300 direct HASBO and left turn via 119° track to CORFU and hold.

D-ATIS 124.65	FORT MYERS APP CON ★ 125.15 306.2 (RWY 6) 126.8 306.2 (RWY 24)	FORT MYERS TOWER ★ 128.75 (CTAF) 0 257.8	GND CON 121.9 257.8	CLNC DEL 132.075	UNICOM 122.95
-------------------------	--	---	-------------------------------	----------------------------	-------------------------

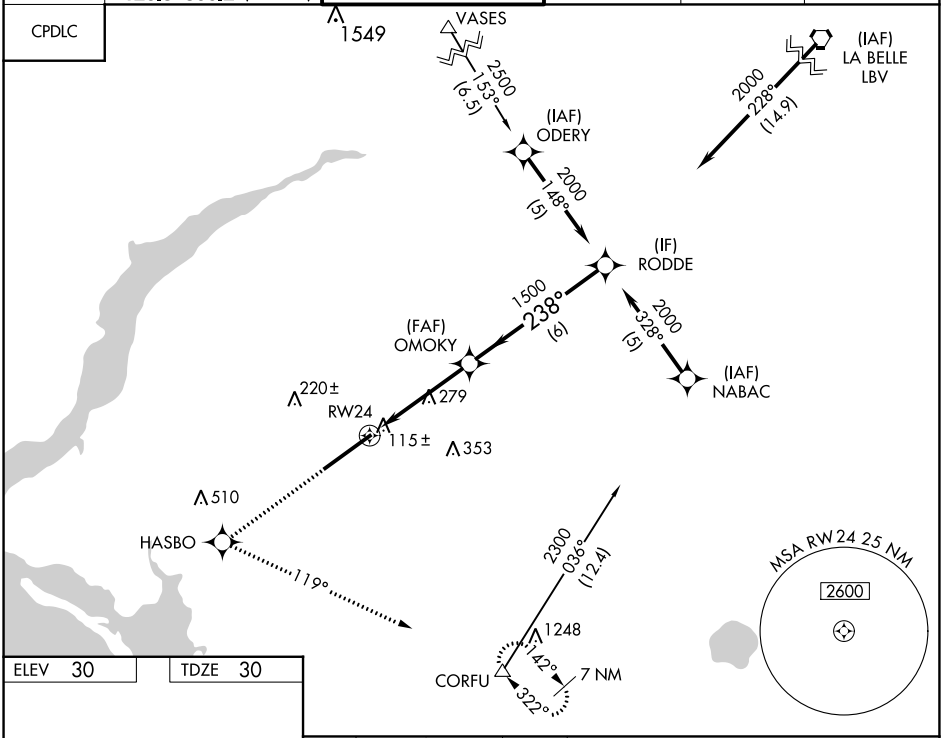

ELEV 30

TDZE 30

238° to RWY24

TWR 168

83

12000 x 150

A5

2300 HASBO

tr 119°

CORFU

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/ TCH 72).

*1.5 NM to RWY24

*LNAV only

OMOKY

238°

1500

2000

Procedure Turn NA

GP 3.00° TCH 52

1.5 NM

2.9 NM

6 NM

CATEGORY	A	B	C	D
LPV DA		280-3¼	250 (300-¾)	
LNAV/VNAV DA		420-1¼	390 (400-1¼)	
LNAV MDA	580-1	550 (600-1)	580-1½ 550 (600-1½)	580-1¾ 550 (600-1¾)
CIRCLING	580-1	550 (600-1)	580-1½ 550 (600-1½)	660-2 630 (700-2)

REIL Rwy 24

TDZ/CL Rwy 6

HIRL Rwy 6-24