

CLEVELAND, OHIO



AL-84 (FAA)

22139

WAAS CH 40109 W28A	APP CRS 281°	Rwy Idg 6018 TDZE 799 Apt Elev 799
--	------------------------	---

RNAV (GPS) RWY 28
CLEVELAND-HOPKINS INTL (CLE)

RNP APCH.			MALSF 	MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 direct DJB VOR/DME and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling Rwy 10 NA at night. Inop table does not apply to LPV.						
D-ATIS ARR DEP	127.85 132.375	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45	CLNC DEL 125.05 273.45	CPDLC

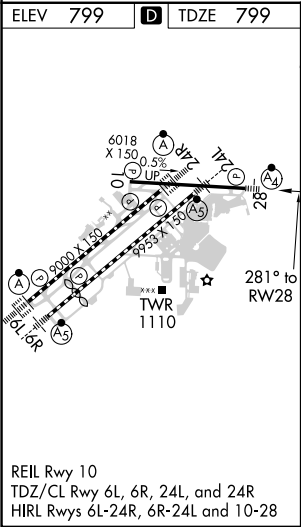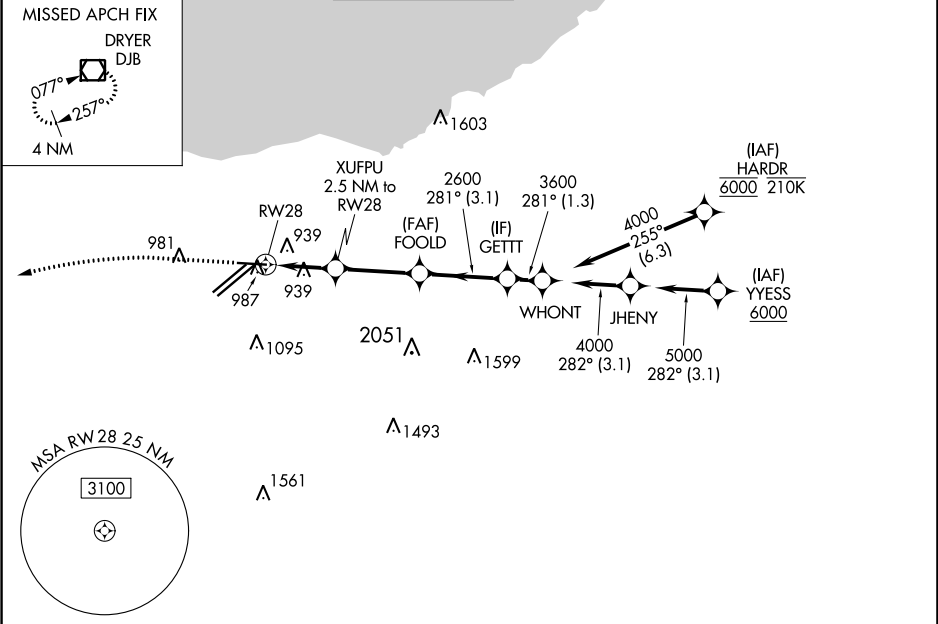

1400

↑

3000

↖

DJB

◻

*LNAV only.

RW28

↖

1.3 NM

↖

1.2 NM

↖

3 NM

↖

3.1 NM

↖

XUFPU

2.5 NM to RW28

FOOLD

2600

GETTT

3600

*1.3 NM to RW28

↖

*1640

↖

281°

↖

2600

↖

GP 3.00°

TCH 46

CATEGORY	A	B	C	D
LPV DA	999/40 200 (200-¾)			
LNAV/VNAV DA	1168/40 369 (400-¾)			
LNAV MDA	1260/40 461 (500-¾)	1260/60 461 (500-1¼)		
CIRCLING	1420-1 621 (700-1)	1420-1¾ 621 (700-1¾)	1420-2 621 (700-2)	

CLEVELAND, OHIO
Amdt 3 24MAY18

41°25'N-81°51'W

CLEVELAND-HOPKINS INTL (CLE)
RNAV (GPS) RWY 28

EC-2, 18 MAY 2023 to 15 JUN 2023

EC-2, 18 MAY 2023 to 15 JUN 2023