

WAAS
CH **53412**
W34A

APP CRS
344°

Rwy Idg
TDZE
Apt Elev

7455
680
710

RNAV (GPS) RWY 34


FORT WORTH MEACHAM INTL (FTW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALS, increase LNAV/VNAV Cat D and LNAV Cat D visibility to 1½ mile.

MALS

MISSED APPROACH: Climb to 3000 direct WORD and hold.

ATIS 120.7	REGIONAL APP CON (North) 118.1 306.95 (South) 135.975 379.9	MEACHAM TOWER 118.3 257.8	GND CON 121.9	CLNC DEL 124.65
----------------------	---	-------------------------------------	-------------------------	---------------------------

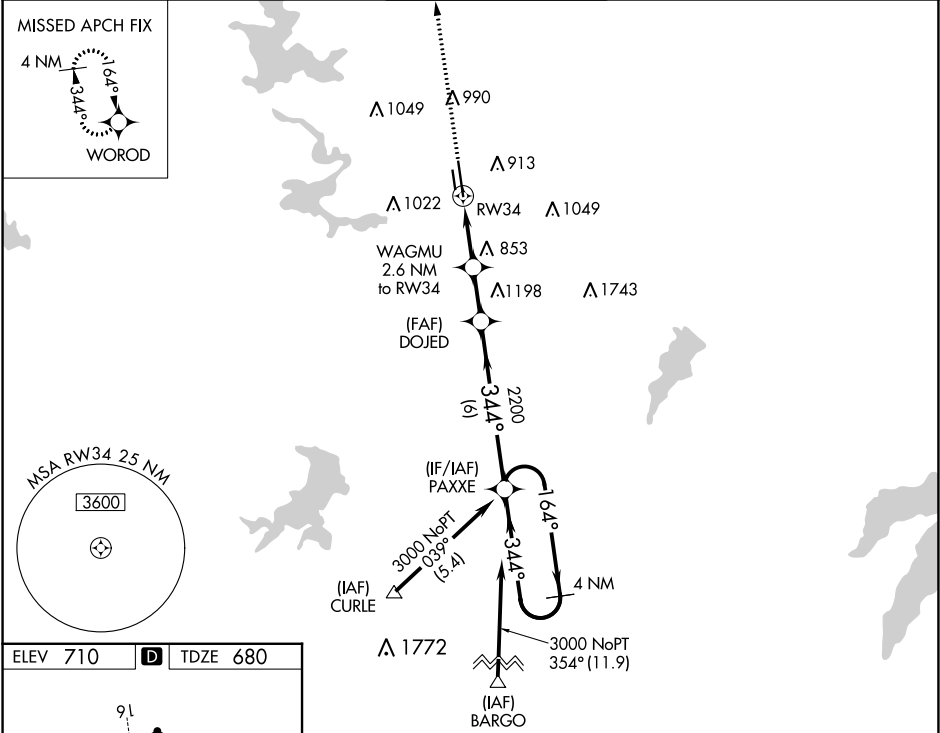

3000	WOROD	WAGMU 2.6 NM to RW34	DOJED	PAXXE	4 NM Holding Pattern
*LNAV only	*1.3 NM to RW34	2200	344°	164°	3000
		1560*	2200		GP 3.00° TCH 60
	1.3 NM	1.3 NM	2 NM	6 NM	
CATEGORY	A	B	C	D	
LPV DA		880-¾	200 (200-¾)		
LNAV/VNAV DA		1091-1½	411 (400-1½)		
LNAV MDA	1160-¾	480 (500-¾)	1160-1½	480 (500-1½)	
C CIRCLING	1260-1 550 (600-1)	1280-1 570 (600-1)	1340-1¾ 630 (700-1¾)	1500-2½ 790 (800-2½)	