

WAAS CH 82707 W30B	APP CRS 295°	Rwy Idg TDZE 5599 Apt Elev 5673
--	------------------------	---

RNAV (GPS) RWY 30R
ROCKY MOUNTAIN METRO (BJC)


NA Baro-VNAV and VDP NA when using Denver Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Denver Intl altimeter setting and increase all DA 82 feet and all MDA 100 feet, increase LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C visibility ¼ mile. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1 ½ mile and LNAV Cat C/D visibility to 1 mile. For inoperative MALSR, when using Denver Intl altimeter setting, increase LPV all Cats visibility to 1 mile, LNAV/VNAV all Cats visibility to 1 ½ mile and LNAV Cat A/B visibility to 1 mile and Cat C/D visibility to 1 ½ mile.


MALSR



MISSED APPROACH: Climb to 6300 then climbing right turn to 10300 direct HYGEM and hold, continue climb-in-hold to 10300.

ATIS 126.25	DENVER APP CON 125.12 263.02	METRO TOWER★ 118.6 (CTAF) 233.7	GND CON 121.7	CLNC DEL 132.6
-----------------------	--	---	-------------------------	--------------------------

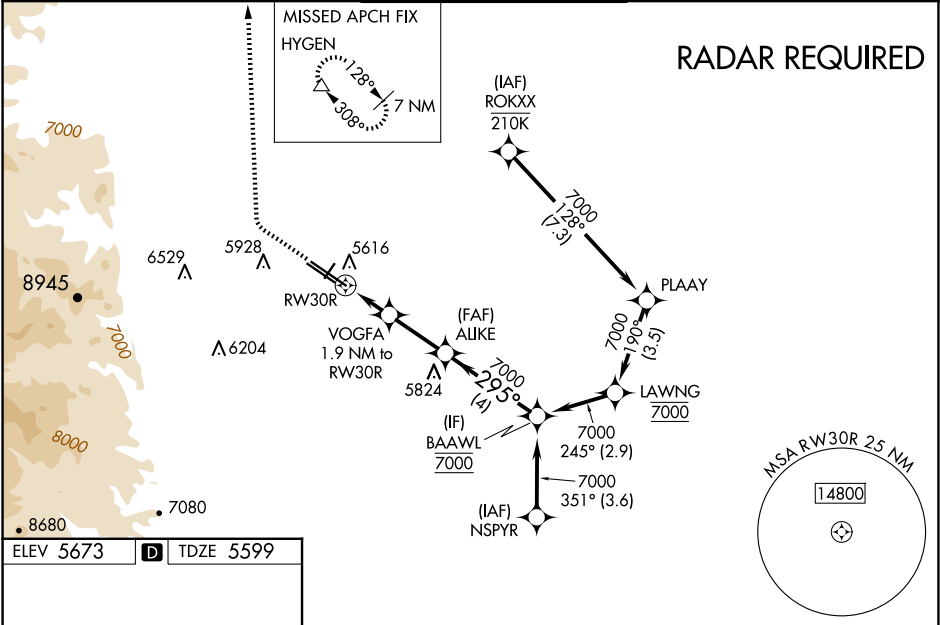

ELEV 5673	D	TDZE 5599
		
6300 10300 HYGEM ↑ ↗ *LNAV only. VOGFA 1.9 NM to RW30R *1 NM to RW30R RW30R 6220* 295° 7000 GP 3.00° TCH 52		
CATEGORY	A	B C D
LPV DA	5799-½	200 (200-½)
LNAV/VNAV DA	5900-⅝	301 (300-⅝)
LNAV MDA	5940-½ 341 (300-½)	5940-⅝ 341 (300-⅝)
C CIRCLING	6180-1 507 (600-1)	6240-1 567 (600-1) 6360-2 687 (700-2) 6860-3 1187 (1200-3)

SW-1, 20 MAR 2025 to 17 APR 2025

SW-1, 20 MAR 2025 to 17 APR 2025