


|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Ldg  | 6501 |
| 288°    | TDZE     | 10   |
|         | Apt Elev | 18   |

RNAV (RNP) Y RWY 29



NEWARK LIBERTY INTL (EWR)

|                                                                                                                                                                                                                                                                  |  |  |                                                                 |  |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|-----------------------------------------------------------------|--|--|
| RNP AR APCH. RF required.                                                                                                                                                                                                                                        |  |  | MISSED APPROACH: Climb to 2000 on track 288° to MUFIE and hold. |  |  |
| Straight-in Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C.<br>**Missed approach requires a minimum climb of 417 feet per NM to 800. |  |  |                                                                 |  |  |

|               |                |              |         |          |       |
|---------------|----------------|--------------|---------|----------|-------|
| D-ATIS        | NEWARK APP CON | NEWARK TOWER | GND CON | CLNC DEL | CPDLC |
| 115.7 134.825 | 128.55 379.9   | 118.3 257.6  | 121.8   | 118.85   |       |

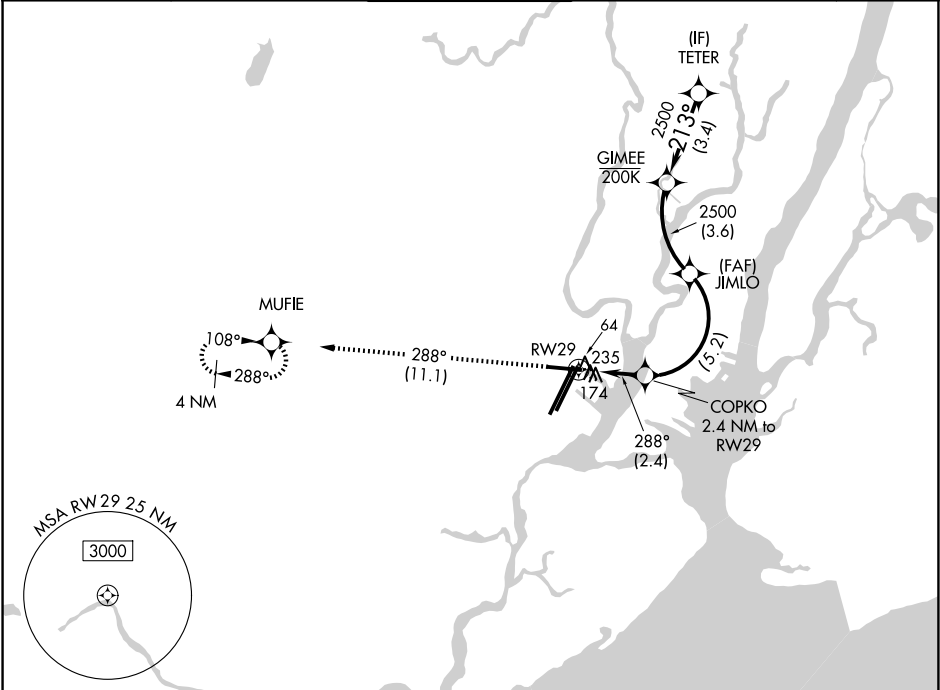

|      |    |      |    |
|------|----|------|----|
| ELEV | 18 | TDZE | 10 |
|------|----|------|----|

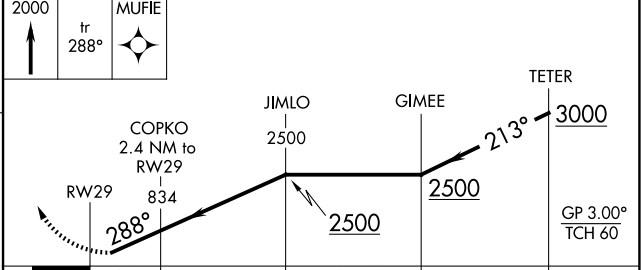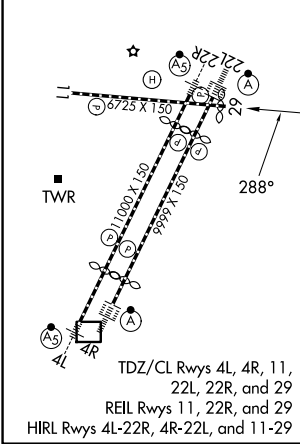

| CATEGORY    | A | B         | C            | D |
|-------------|---|-----------|--------------|---|
| RNP 0.16 DA |   | 461-1½    | 451 (500-1½) |   |
| RNP 0.30 DA |   | ** 530-1¾ | 520 (600-1¾) |   |
| RNP 0.30 DA |   | 573-1⅞    | 563 (600-1⅞) |   |

AUTHORIZATION REQUIRED

RNAV (RNP) Y RWY 29

NE-2, 25 DEC 2025 to 22 JAN 2026

NE-2, 25 DEC 2025 to 22 JAN 2026