

WAAS CH 56329 W27B	APP CRS 272°	Rwy Ldg 6000 TDZE 7126 Apt Elev 7171
--	------------------------	---


RNAV (GPS) Z RWY 27
LOS ALAMOS (LAM)

LOS ALAMOS (LAM)

T When local altimeter setting not received, procedure NA. *LP and *LNAV missed approach requires a minimum climb of 280 feet per NM to 8500. DME/DME RNP-0.3 NA. **A** Visibility reduction by helicopters NA.

MISSED APPROACH:
Climbing right turn to 11000
direct ZEDAN and hold.

AWOS-3 124.175	ALBUQUERQUE CENTER 132.8 346.35	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

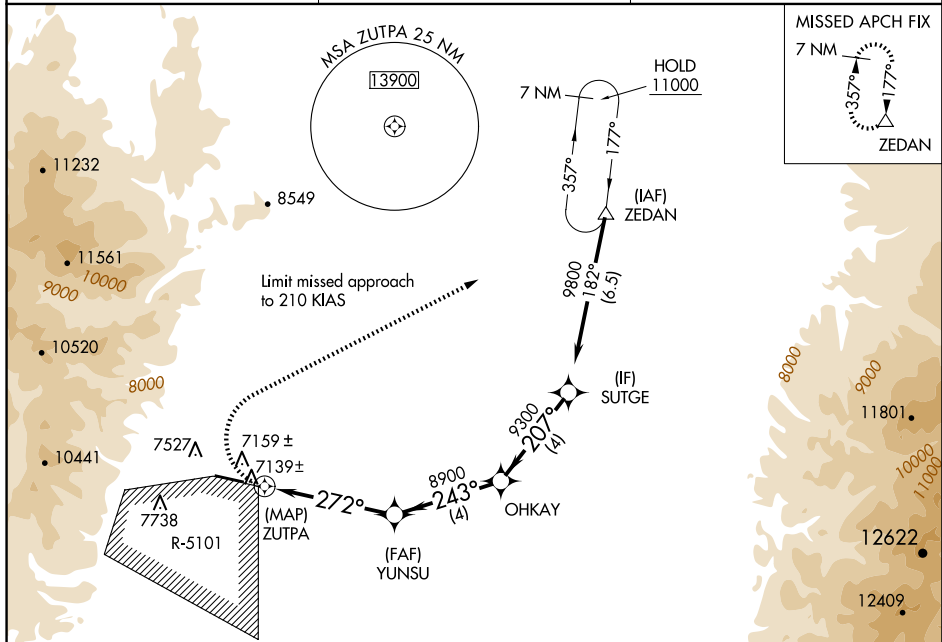

ELEV 7171

TDZE 7126

11000 	ZEDAN 		
-----------	-----------	--	--

CATEGORY	A	B	C	D
LP MDA*	7580-1	454 (500-1)	7580-1 $\frac{3}{8}$ 454 (500-1 $\frac{3}{8}$)	NA
LP MDA	7700-1	574 (600-1)	7700-1 $\frac{1}{8}$ 574 (600-1 $\frac{1}{8}$)	NA
LNAV MDA*	7640-1	514 (500-1)	7640-1 $\frac{5}{8}$ 514 (500-1 $\frac{5}{8}$)	NA
LNAV MDA	7880-1 754 (800-1)	7880-1 $\frac{1}{4}$ 754 (800-1 $\frac{1}{4}$)	7880-2 $\frac{1}{2}$ 754 (800-2 $\frac{1}{2}$)	NA
CIRCLING	NA			

REIL Rwy 27

MIRL Rwy 9-27