VOR/DME DVL	APP CRS	Rwy Idg	4314
111.0	030°	TDZE	1450
Chan 47		Apt Elev	1470

VOR RWY 3
DEVILS LAKE RGNL (DVL)

When local altimeter setting not received, use Cando altimeter setting and increase all MDA 80 feet, increase S-3 Cat A and Circling Cat C visibility ¼ mile, increase CAMPG FIX MINIMUMS S-3 Cats C/D visibility ⅜ mile and Circling Cats C/D ¼ mile. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 then climbing right turn to 3500 direct DVL VOR/DME and hold.

AWOS-3PT	GRAND FORKS RADIO	UNICOM
125.875	122.3	122.8 (CTAF) L

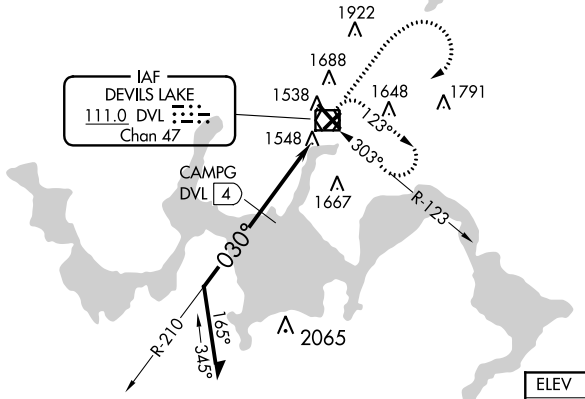



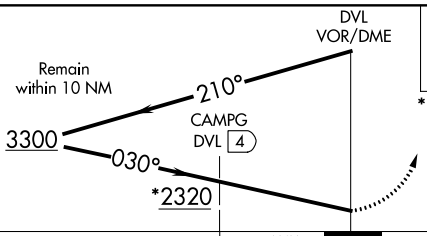

3000	3500	DVL

*2400 when using Cando altimeter setting.

CATEGORY	A	B	C	D
S-3	2320-1 870 (900-1)	2320-1¼ 870 (900-1¼)	2320-2½ 870 (900-2½)	
C CIRCLING	2320-1¼ 850 (900-1¼)		2320-2½ 850 (900-2½)	2320-2¾ 850 (900-2¾)
CAMPG FIX MINIMUMS				
S-3	1820-1 370 (400-1)			
C CIRCLING	2000-1 530 (600-1)		2240-2¼ 770 (800-2¼)	2240-2½ 770 (800-2½)

ELEV 1470 D TDZE 1450

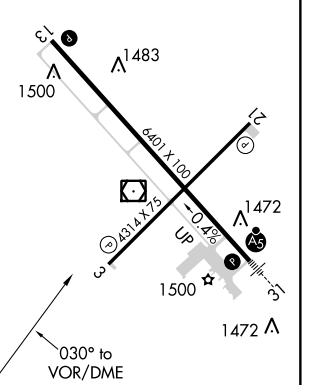

HIRL Rwy 13-31 L
REIL Rwys 3, 13, and 21 L
MIRL Rwy 3-21 L

NC-1, 26 APR 2018 to 24 MAY 2018
NC-1, 26 APR 2018 to 24 MAY 2018