

MMALT FIVE DEPARTURE (RNAV)


HOUSTON, TEXAS

SC-5, 12 SEP 2019 to 10 OCT 2019


TAKEOFF MINIMUMS

Rwy 17, 35: Standard with minimum climb of 500' per NM to 600.

- ATIS 118.125
- CINC DEL 121.4
- HOUSTON CINC DEL 119.25 (when lower closed)
- GND CON 121.4
- SUGARLAND TOWER * 118.65 (CTAF)
- HOUSTON DEP CON 123.8 257.7



TOP ALTITUDE: ASSIGNED BY ATC

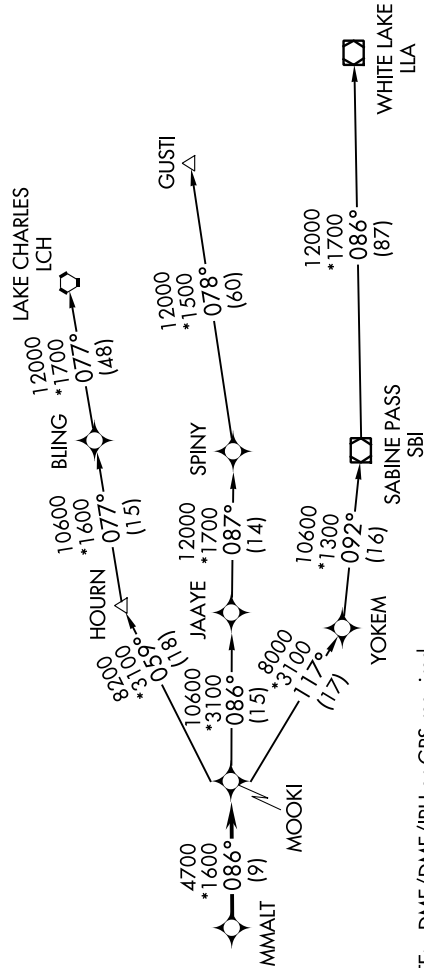

- NOTE: DME/DME/IRU or GPS required.
- NOTE: RADAR required.
- NOTE: RNAV 1.
- NOTE: GUSTI and LCH TRANSITIONS ATC assigned only for aircraft departing AXH, EFD, GLS, HPY, IWS, LBX, LVJ, SGR, TME, T00, T41 and 54T.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 17: Climb on heading 170° to 1500 for RADAR vectors to MMALT, thence. . . .

TAKEOFF RWY 35: Climb on heading 350° to 1100 for RADAR vectors to MMALT, thence. . . .

. . . on track 086° to MOOKI, then on (transition). Maintain ATC assigned altitude.
Expect filed altitude 10 minutes after departure.

- GUSTI TRANSITION (MMALT5.GUSTI)
- LAKE CHARLES TRANSITION (MMALT5.LCH)
- WHITE LAKE TRANSITION (MMALT5.LLA)

NOTE: Chart not to scale.