WAAS CH 86229 W18A	APP CRS 179°	Rwy Idg 5849 TDZE 71 Apt Elev 75

RNAV (GPS) RWY 18

ST LANDRY PARISH-AHART FIELD (OPL)

T NA Baro-VNAV NA when using Lafayette altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). When VGSI inop, Straight-in/Circling Rwy 18 procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Circling to Rwy 6/24 NA at night. When local altimeter setting not received, use Lafayette altimeter setting and increase all DA 56 feet and all MDA 60 feet, increase LNAV/VNAV all Cats visibility and LNAV and Circling Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 2300 direct YOLUG and hold.

AWOS-3PT	LAFAYETTE APP CON★	GCO	UNICOM
118.775	128.7 268.7	135.075	123.0 (CTAF) L

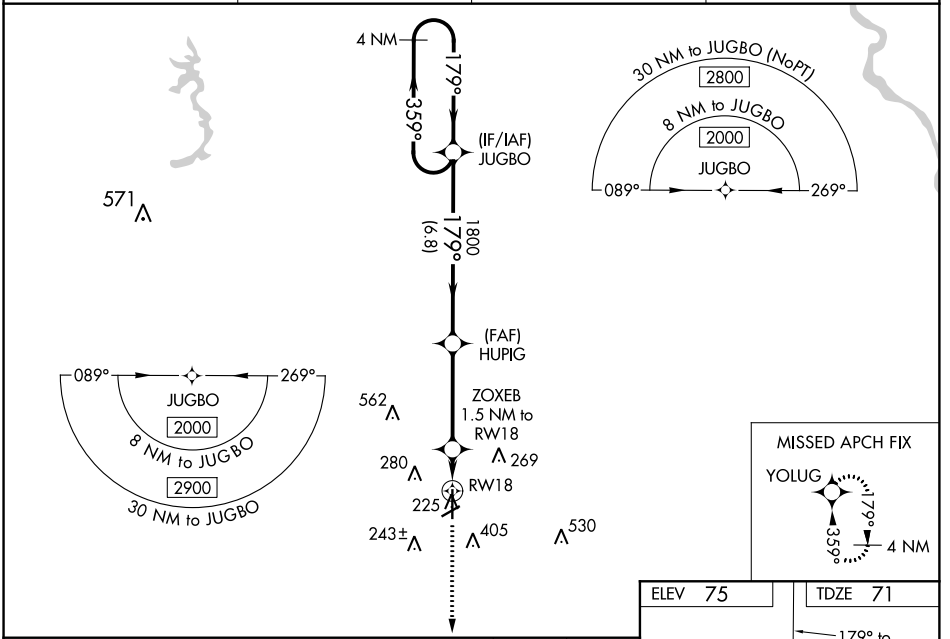

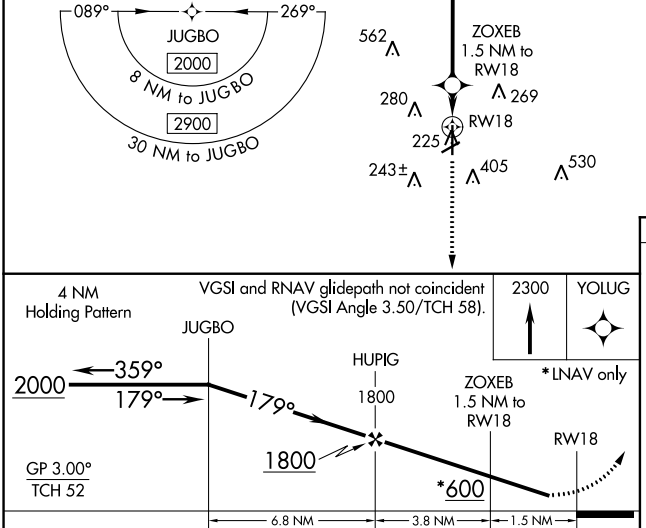

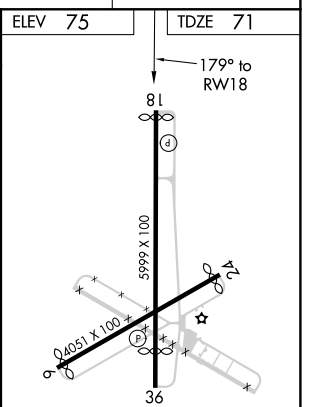

CATEGORY	A	B	C	D
LPV DA	321-1 250 (300-1)			
LNAV/VNAV DA	386-1 315 (400-1)			
LNAV MDA	480-1 409 (500-1)		480-1⅛ 409 (500-1⅛)	
CIRCLING	780-1 705 (800-1)		780-2 705 (800-2)	780-2¼ 705 (800-2¼)

REIL Rwys 18 and 36 L
MIRL Rwy 18-36 L

SC-4, 12 SEP 2019 to 10 OCT 2019
SC-4, 12 SEP 2019 to 10 OCT 2019