

VORTAC SZW 117.5 Chan 122	APP CRS 173°	Rwy Idg 7000 TDZE 83 Apt Elev 83
---	------------------------	---




VOR RWY 18

TALLAHASSEE INTL (TLH)

⚠ Helicopter visibility reduction below 3/4 SM NA. VDP NA with Bainbridge altimeter setting. When local altimeter setting not received, use Bainbridge altimeter setting and increase all MDA 100 feet. Increase S-18 Cat B and Circling Cats B/D visibility 1/4 mile and S-18 Cats C/D and Circling Cat C visibility 1/2 mile. Increase WAPIM fix minimums S-18 Cats C/D and Circling Cat C visibility 1/4 mile.

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct SZW VORTAC and hold.

ATIS 119.45 239.25	TALLAHASSEE APP CON * 135.8 317.4	TALLAHASSEE TOWER * 118.7 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 126.65 275.8	UNICOM 123.075
------------------------------	---	--	-------------------------------	---------------------------------	--------------------------

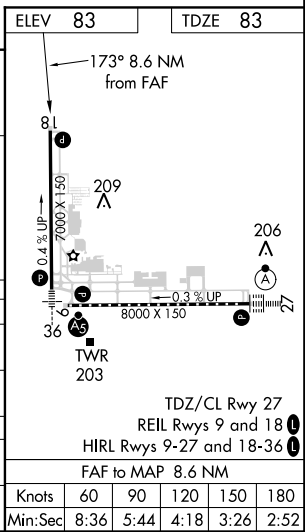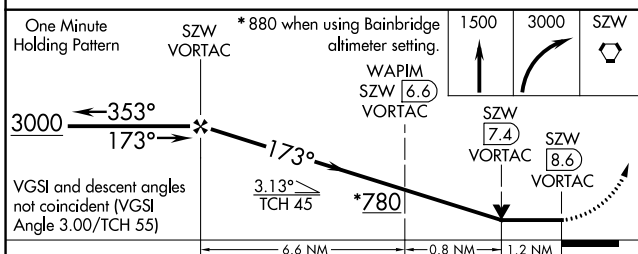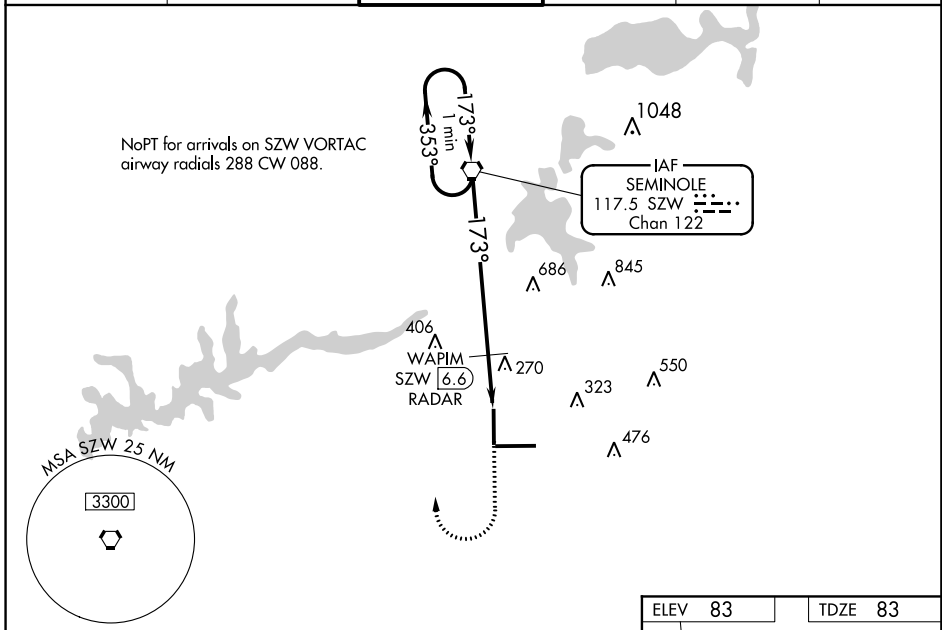

CATEGORY	A	B	C	D
S-18	780-1	697 (700-1)	780-2	697 (700-2)
CIRCLING	780-1	697 (700-1)	780-2 697 (700-2)	780-2 1/4 697 (700-2 1/4)
WAPIM FIX MINIMUMS				
S-18	540-1	457 (500-1)	540-1 3/8	457 (500-1 3/8)
CIRCLING	580-1	497 (500-1)	580-1 1/2 497 (500-1 1/2)	640-2 557 (600-2)

SE-3, 10 OCT 2019 to 07 NOV 2019

SE-3, 10 OCT 2019 to 07 NOV 2019

TDZ/CL Rwy 27	
REIL Rwy 9 and 18	
HIRL Rwy 9-27 and 18-36	
FAF to MAP 8.6 NM	
Knots	60 90 120 150 180
Min:Sec	8:36 5:44 4:18 3:26 2:52