

WAAS CH 82421 W10A	APP CRS 102°	Rwy Idg TDZE Apt Elev	5499 914 914
----------------------------------------	------------------------	-----------------------------	-----------------------------------------


RNAV (GPS) RWY 10

GENESEE COUNTY (GVQ)


NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 38°C (100°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rochester altimeter setting and increase LPV DA all Cats to 1214, LNAV/VNAV DA all Cats to 1268, and all MDA 120 feet; increase LPV all Cats and Circling Cat D visibility ¼ mile, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅜ mile. Baro-VNAV and VDP NA when using Rochester altimeter setting.

MISSED APPROACH:
Climb to 3000 direct POCZI and hold.

AWOS-3PT 127.525	ROCHESTER APP CON 123.7 322.3	CLNC DEL 121.8	UNICOM 122.7 (CTAF) 0
----------------------------	-----------------------------------------	--------------------------	---------------------------------

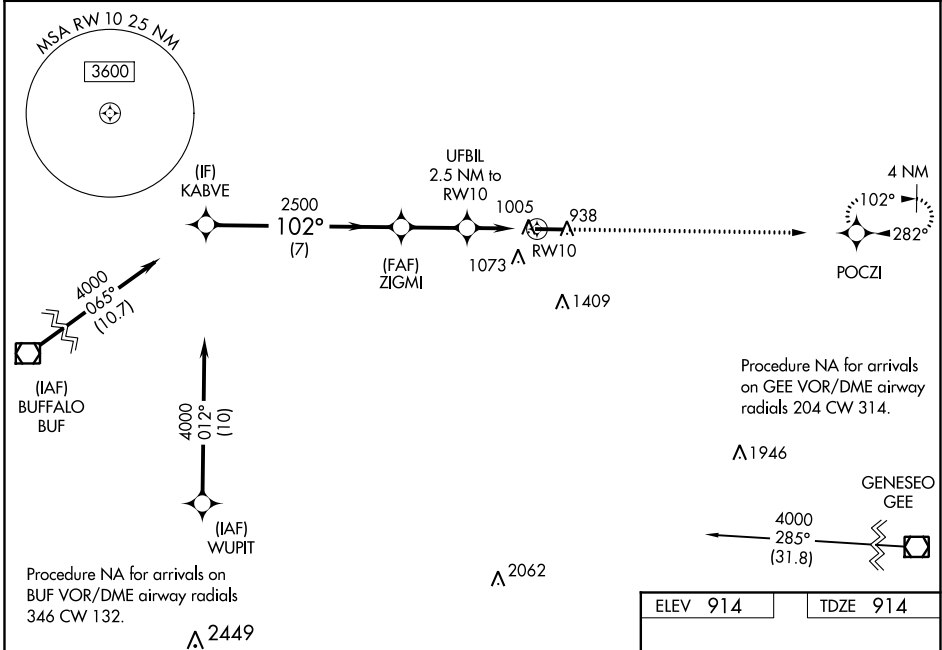

KABVE	4000	102°	ZIGMI	2500	UFBIL 2.5 NM to RW10	* 1 NM to RW10	RW10	3000 POCZI	* LNAV only.
CATEGORY	A	B	C	D					
LPV DA	1114-¾		200 (200-¾)						
LNAV/VNAV DA	1168-⅞		254 (300-⅞)						
LNAV MDA	1260-1		346 (400-1)						
CIRCLING	1380-1	466 (500-1)	1380-1½ 466 (500-1½)	1480-2 566 (600-2)					

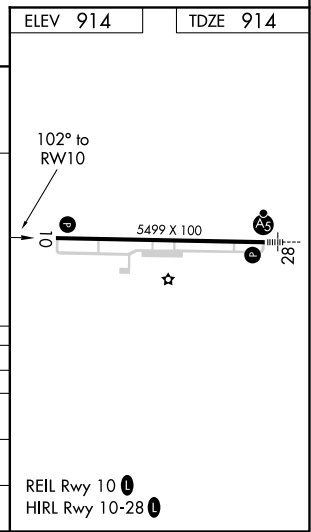

NE-2, 10 OCT 2019 to 07 NOV 2019

NE-2, 10 OCT 2019 to 07 NOV 2019