

LOM TU 420	APP CRS 001°	Rwy Idg 7150
		TDZE 347
		Apt Elev 347




NDB RWY 36

TUPELO RGNL (TUP)

▼ When local altimeter setting not received, use Columbus AFB altimeter setting and increase all MDA 120 feet, increase S-36 Cats C and D visibility $\frac{3}{8}$ SM and Circling Cats C and D $\frac{1}{2}$ SM. For inop ALS, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to $1\frac{3}{8}$ SM. For inop ALS when using Columbus AFB altimeter setting, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to $1\frac{3}{8}$ SM.

▲ NA MALSR MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct TU LOM and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 254.275	GND CON 121.825 254.275
------------------------	---------------------------------------	---	-----------------------------------

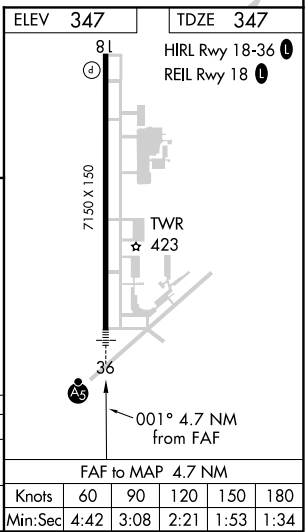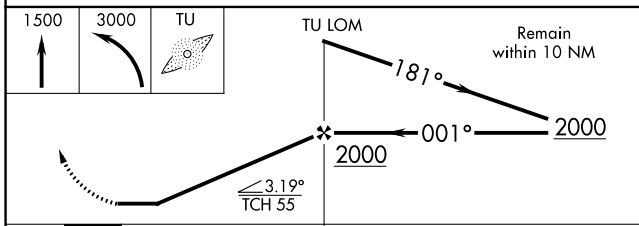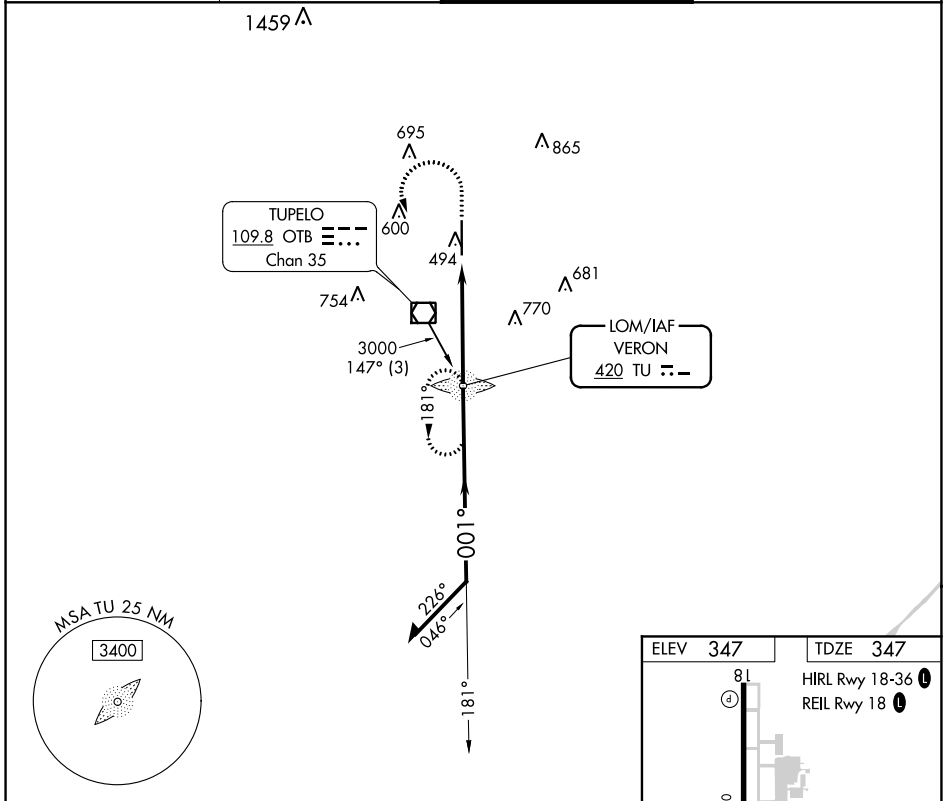

CATEGORY	A	B	C	D
S-36	840- $\frac{3}{4}$ 493 (500- $\frac{3}{4}$)		840-1 493 (500-1)	
CIRCLING	840-1 493 (500-1)		900- $1\frac{1}{2}$ 553 (600- $1\frac{1}{2}$)	1140- $2\frac{1}{2}$ 793 (800- $2\frac{1}{2}$)

SC-4, 09 SEP 2021 to 07 OCT 2021

SC-4, 09 SEP 2021 to 07 OCT 2021