


LOC I-LMJ 110.7	APP CRS 218°	Rwy Idg 11001 TDZE 964 Apt Elev 964
---------------------------	------------------------	--




ILS or LOC RWY 22

GREENVILLE SPARTANBURG INTL (GSP)

⚠ When local altimeter setting not received, use Greenville Downtown altimeter setting: increase DA to 1193; increase all MDAs 40 feet and visibility S-LOC 22 Cats C and D to RVR 3500 and Circling Cat D ½ SM. For inop ALS, increase S-LOC 22 Cat C/D visibility to RVR 5500.

MALSR
 MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct SPA VORTAC and hold.

ATIS 134.25	GREER APP CON ★ 118.8 270.275	GREER TOWER ★ 120.1 (CTAF) 0 251.15	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

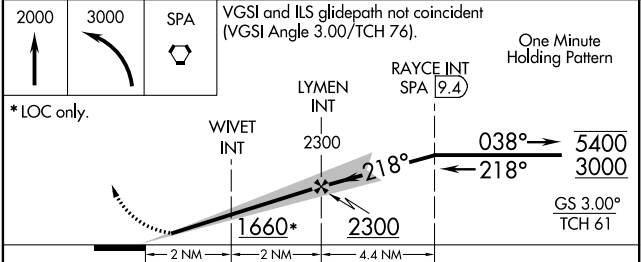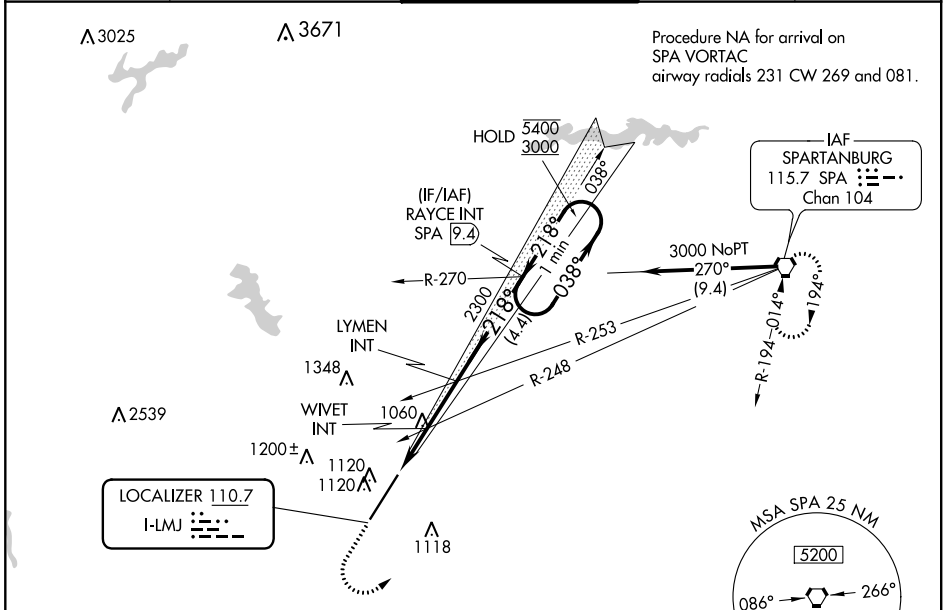

CATEGORY	A	B	C	D
S-ILS 22	1164/24		200 (200-½)	
S-LOC 22	1320/24	356 (400-½)	1320/30	356 (400-¾)
C CIRCLING	1440-1	476 (500-1)	1480-1½ 516 (600-1½)	1700-2¼ 736 (800-2¼)

ELEV 964	TDZE 964				
CL Rwy 22 HIRL Rwy 4-22 TDZ/CL Rwy 4					
FAF to MAP 4 NM					
Knots	60	90	120	150	180
Min:Sec	4:00	2:40	2:00	1:36	1:20

SE-2, 09 SEP 2021 to 07 OCT 2021

SE-2, 09 SEP 2021 to 07 OCT 2021