

LOC/DME I-PQL 110.1 Chan 38	APP CRS 168°	Rwy Idg 6500 TDZE 17 Apt Elev 17
---	------------------------	---




ILS or LOC RWY 17

TRENT LOTT INTL (PQL)

When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase DA to 292 feet; increase all MDA 80 feet and S-LOC 17 visibility Cat B ¼ mile, and Cats C and D ½ mile, increase Circling visibility Cats B and C ¼ mile. OTIME Fix Minimums, increase S-LOC 17 visibility Cats C and D ½ mile and Circling Cats C and D ½ mile. For inop MALSRS when using Mobile Rgnl altimeter setting increase S-ILS all Cats visibility to ¾ mile.

MALSRS
MISSED APPROACH: Climb to 900 then climbing left turn to 2000 direct SJJ VORTAC and hold.

ATIS 135.175	MOBILE APP CON★ 121.0 307.1	TRENT LOTT TOWER★ 118.575 (CTAF) 0	GND CON 121.725	CLNC DEL 121.725	UNICOM 122.8
------------------------	---------------------------------------	--	---------------------------	----------------------------	------------------------

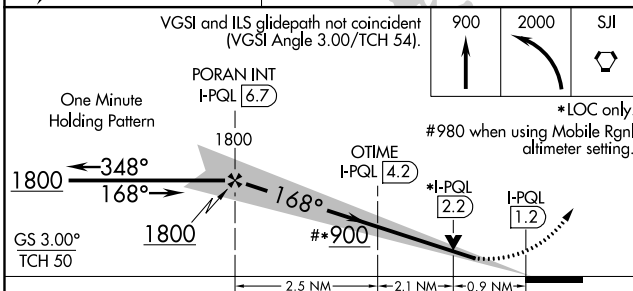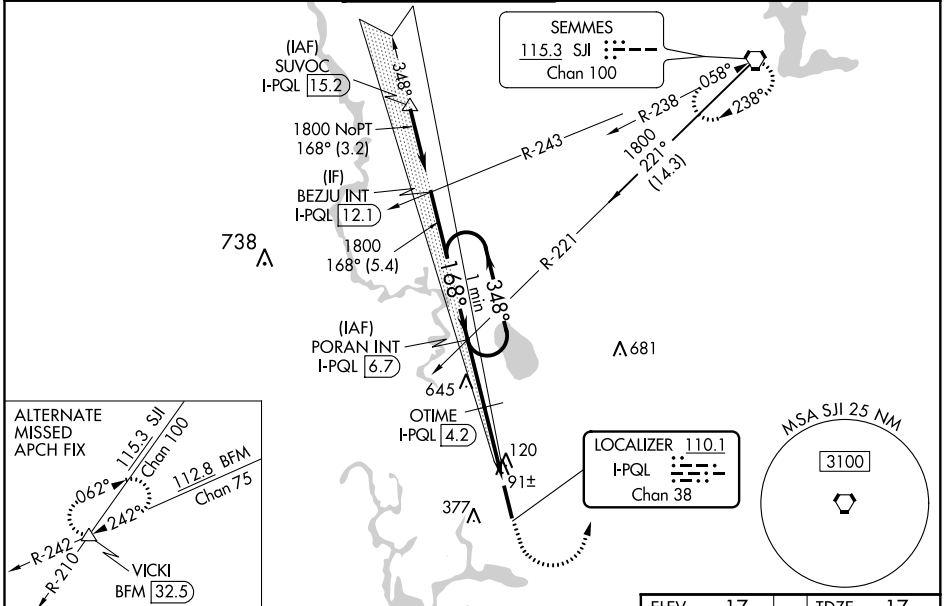

CATEGORY	A	B	C	D
S-ILS 17	217-½ 200 (200-½)			
S-LOC 17	900-¾ 883 (900-¾)		900-2 883 (900-2)	
CIRCLING	900-1¼ 883 (900-1¼)		900-2¾ 883 (900-2¾)	900-3 883 (900-3)
OTIME FIX MINIMUMS				
S-LOC 17	360-½ 343 (400-½)		360-¾ 343 (400-¾)	
CIRCLING	480-1 463 (500-1)	680-1 663 (700-1)	680-1¾ 663 (700-1¾)	680-2 663 (700-2)

