ILS or LOC RWY 19

NORTHEASTERN RGNL (EDE)

LOC/DME I-EDE	APP CRS	Rwy Idg	6001
110.95	190°	TDZE	20
Chan 46 (Y)		Apt Elev	20

DME or RADAR required for procedure entry.

When local altimeter setting not received, use Elizabeth City altimeter setting and increase all DA 56 feet and all MDA 60 feet and increase S-ILS 19 all Cats and S-LOC 19 Cats C/D visibility ⅛ mile. VDP NA when using Elizabeth City altimeter setting.

MISSED APPROACH: Climb to 600 then climbing right turn to 2500 on heading 030° and I-EDE localizer N course to IDWAP INT/I-EDE 12 DME and hold.

AWOS-3	WASHINGTON CENTER	UNICOM
118.275	123.85 279.65	123.0 (CTAF)

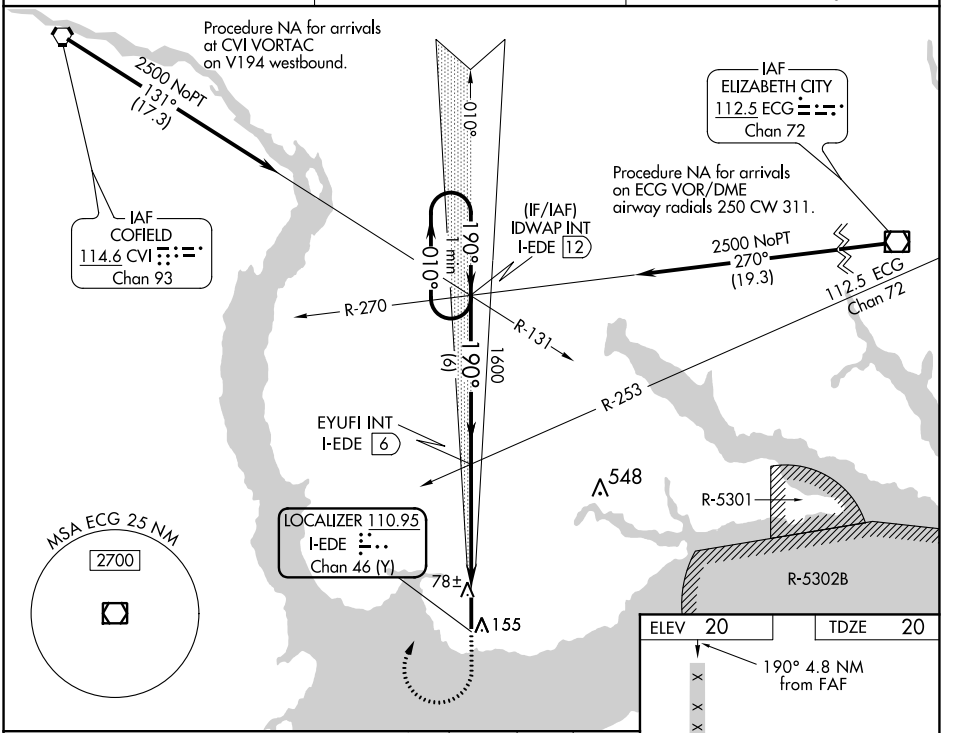

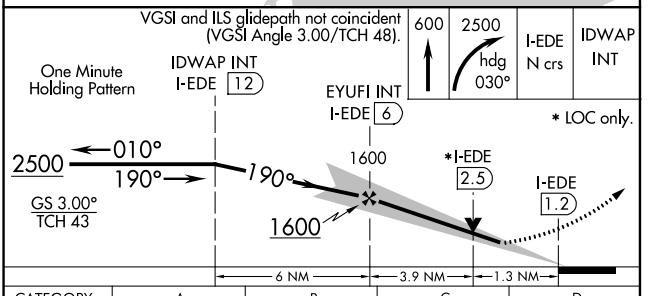

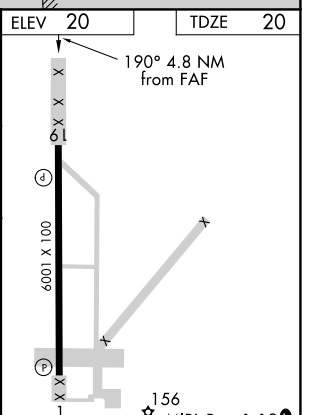

CATEGORY	A	B	C	D
S-ILS 19	220-¾ 200 (200-¾)			
S-LOC 19	480-1 460 (500-1)		480-1⅜ 460 (500-1⅜)	
CIRCLING	520-1 500 (500-1)		560-1½ 540 (600-1½)	580-2 560 (600-2)

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

SE-2, 07 OCT 2021 to 04 NOV 2021
SE-2, 07 OCT 2021 to 04 NOV 2021