


|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>90117</b><br><b>W25A</b> | APP CRS<br><b>254°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>7281</b><br><b>1475</b><br><b>1478</b> |
|--|------------------------|-----------------------------|---|

# RNAV (GPS) RWY 25L

PHOENIX DEER VALLEY (DVT)


|          |  |   |  |   |  |
|----------|--|---|--|---|--|
| RNP APCH |  | <p>When VGSI inop, Circling to Rwy 25R NA at night. Circling NA north of Rwy 7R-25L at night. When local altimeter setting not received, use Scottsdale altimeter setting; increase LPV all Cats DA to 1877 feet and LPV all Cats visibility ¼ SM. Increase all MDA 40 feet and Circling Cats B and C visibility ¼ SM. Rwy 25L helicopter visibility reduction below ¾ SM NA. VDP NA when using Scottsdale altimeter setting.</p> |  | <p>MISSED APPROACH: Climb to 6000 direct BOLES, and via 314° track to HEVRO, and right turn via 072° track to BANYO and hold.</p> |  |
|----------|--|---|--|---|--|

|                      |                                       |  |                         |                          |                         |
|----------------------|---------------------------------------|--|-------------------------|--------------------------|-------------------------|
| ATIS<br><b>126.5</b> | PHOENIX APP CON<br><b>120.7 239.0</b> | DEER VALLEY TOWER *<br><b>118.4</b> (070°-250°) (CTAF)<br><b>120.2</b> (251°-069°) | GND CON<br><b>121.8</b> | CLNC DEL<br><b>123.9</b> | UNICOM<br><b>122.95</b> |
|----------------------|---------------------------------------|--|-------------------------|--------------------------|-------------------------|

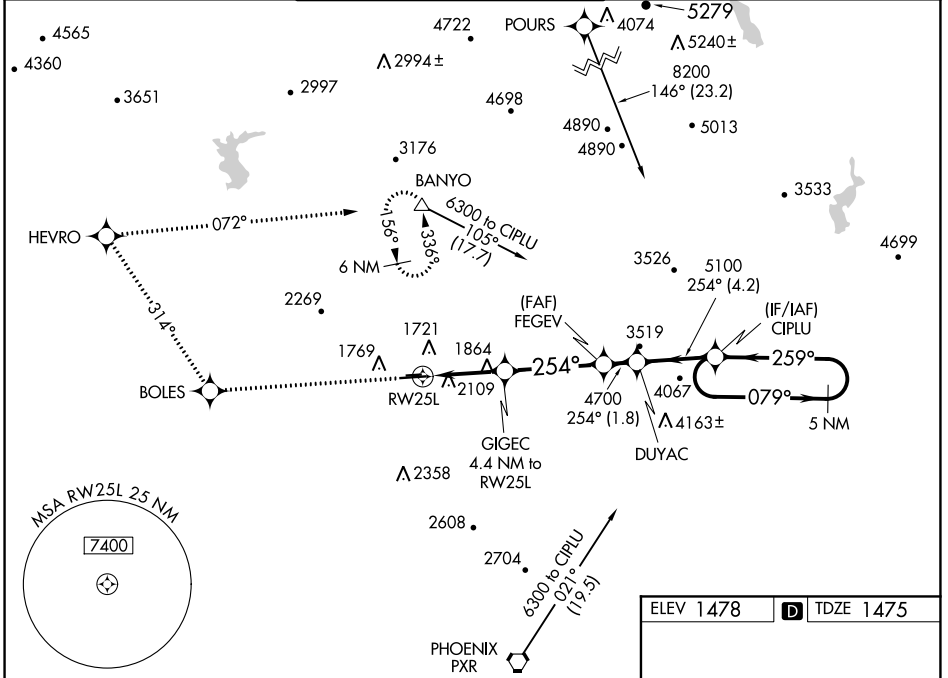

|           |                    |
|-----------|--------------------|
| ELEV 1478 | <b>D</b> TDZE 1475 |
|-----------|--------------------|

|             |                          |         |        |        |
|-------------|--------------------------|---------|--------|--------|
| 6000        | BOLES                    | 314° tr | HEVRO  | BANYO  |
| *LNAV only. | GIGEC<br>4.4 NM to RW25L | FEGEV   | DUYPAC | CIPLU  |
|             | *2.7 NM to RW25L         | 2940    | 4700   | 5600   |
|             | 2.7 NM                   | 1.7     | 5.3 NM | 1.8 NM |



|          |                      |               |               |              |
|----------|----------------------|---------------|---------------|--------------|
| CATEGORY | A                    | B             | C             | D            |
| LPV DA   | 1850-1¼ 375 (400-1¼) |               |               |              |
| LNAV MDA | 2360-1¼              | 885 (900-1¼)  | 2360-2¾       | 885 (900-2¾) |
| CIRCLING | 2400-1¼              | 2420-1¼       | 2420-2¾       | 2420-3       |
|          | 922 (1000-1¼)        | 942 (1000-1¼) | 942 (1000-2¾) | 942 (1000-3) |

MIRL Rwy 7L-25R and 7R-25L  
REIL Rwy 7L, 7R, 25L, and 25R

SW-4, 07 OCT 2021 to 04 NOV 2021

SW-4, 07 OCT 2021 to 04 NOV 2021