

WAAS CH 58218 W14A	APP CRS 139°	Rwy Idg 10000 TDZE 442 Apt Elev 459
--	------------------------	--

RNAV (GPS) RWY 14L

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

⚠


ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F).
DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using St Louis Downtown altimeter setting.
When local altimeter setting not received, use St Louis Downtown altimeter setting; increase LPV DA to 684 feet and LNAV/VNAV DA to 976 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1⁄8 mile and increase Circling Cat C/D visibility 1⁄4 mile.

MISSED APPROACH:

Climb to 2300 direct JIRUB and on track 103° to DUTMY and hold.

ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 263.025
------------------------------	--	------------------------------------	-------------------------------	------------------------------------

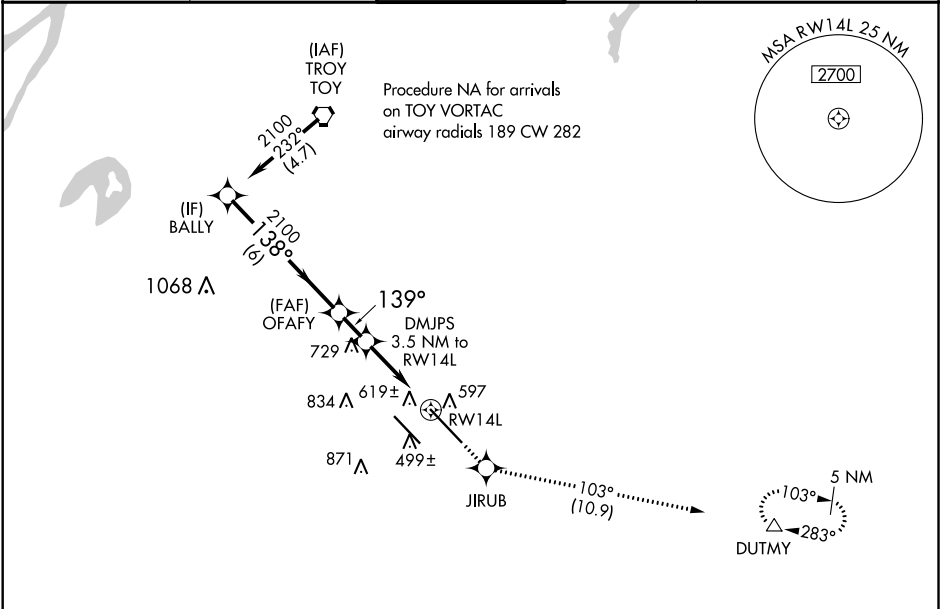

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).				2300 ↑	JIRUB ✦	tr 103° ↑	DUTMY △	ELEV 459	TDZE 442
BALLY 2100 138° 2100 139° *1620 1.2 NM to RWY 14L *RNAV only. GP 3.00° TCH 55 6 NM 1.5 NM 2.3 NM 1.2				139° to RWY 14L 1000 x 130 32R					
CATEGORY	A		B		C		D		
LPV DA	642/40 200 (200-¾)								
LNAV/ VNAV DA	934-1⅝ 492 (500-1⅝)								
LNAV MDA	900/55 458 (500-1)				900-1⅝ 458 (500-1⅝)				
CIRCLING	1000-1 541 (600-1)		1080-1 621 (700-1)		1240-2¼ 781 (800-2¼)		1240-2½ 781 (800-2½)		
REIL Rwy 14L HIRL Rwy 14R-32L and 14L-32R									

EC-3, 21 APR 2022 to 19 MAY 2022

EC-3, 21 APR 2022 to 19 MAY 2022