

WAAS CH 53443	APP CRS 290°	Rwy Idg TDZE 212	5600
W29A		Apt Elev 212	


RNAV (GPS) RWY 29
SAN LUIS COUNTY RGNL (SBP)

RNP APCH

- ⚠ Circling to Rwy 25 NA at night. Circling NA north of Rwy 11-29.
⚠ Rwy 29 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0° C or above 52° C.

MISSED APPROACH: Climb to 1100 then climbing left turn to 4100 direct WUNUL and hold, continue climb-in-hold to 4100.

ATIS 120.6	SANTA BARBARA APP CON★ 127.725 244.575	SAN LUIS TOWER★ 124.0 (CTAF) 0 379.9	GND CON 121.6	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

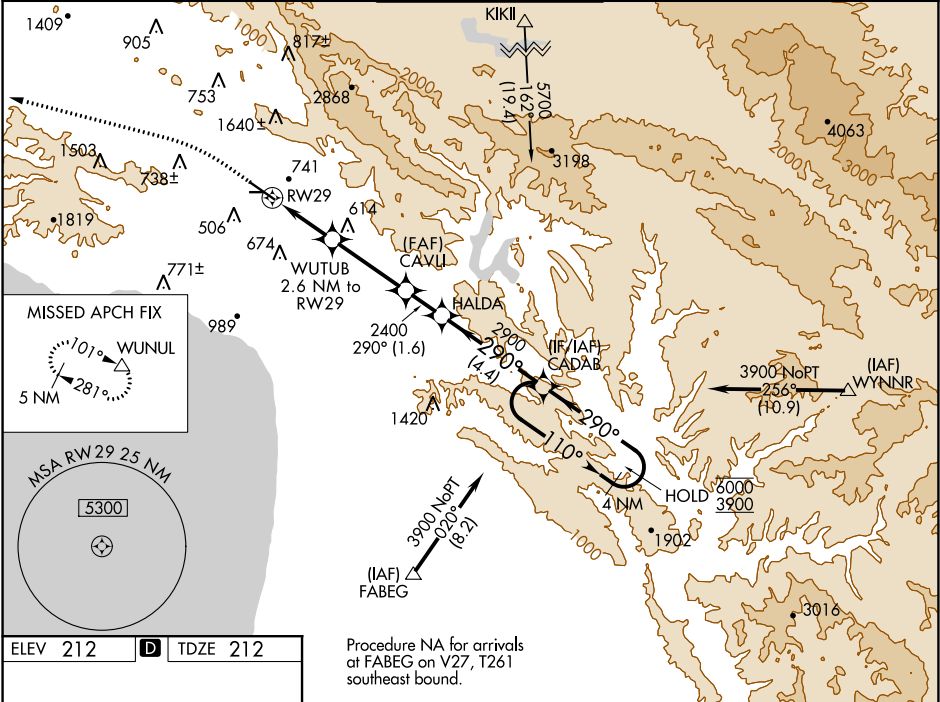

ELEV 212	D	TDZE 212
----------	----------	----------

Procedure NA for arrivals at FABEG on V27, T261 southeast bound.

1100 4100 WUNUL ↑ ↶ △				
*LNAV only WUTUB 2.6 NM to RW29 CAVLI 2400 HALDA CADAB 4 NM Holding Pattern 1100 290° 110° 6000 290° 3900 GP 3.45° TCH 52				
2.6 NM 3.2 NM 1.6 NM 4.4 NM				
CATEGORY	A	B	C	D
LPV DA	831-1 $\frac{3}{4}$ 619 (700-1 $\frac{3}{4}$)			
LNAV/VNAV DA	835-1 $\frac{3}{4}$ 623 (700-1 $\frac{3}{4}$)			
LNAV MDA	1000-1 788 (800-1)	1000-1 $\frac{1}{4}$ 788 (800-1 $\frac{1}{4}$)	1000-2 $\frac{1}{2}$ 788 (800-2 $\frac{1}{2}$)	788 (800-2 $\frac{1}{2}$)
C CIRCLING	1000-1 788 (800-1)	1220-1 $\frac{1}{2}$ 1008 (1100-1 $\frac{1}{2}$)	1460-3 1248 (1300-3)	1560-3 1348 (1400-3)