


WAAS CH 65912 W13A	APP CRS 131°	Rwy Idg 6724 TDZE 240 Apt Elev 240
--	------------------------	---

RNAV (GPS) RWY 13L

CHICO MUNI (CIC)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 3600 direct UNJED and hold, continue climb-in-hold to 3600.
Circling NA east of Rwy 13L-31R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and increase LNAV Cats C/D visibility to 1 SM.		

ATIS 119.675	OAKLAND CENTER 132.2 350.3	CHICO TOWER * 121.0 (CTAF) 0 239.3	GND CON 121.9	UNICOM 122.95
------------------------	--------------------------------------	--	-------------------------	-------------------------

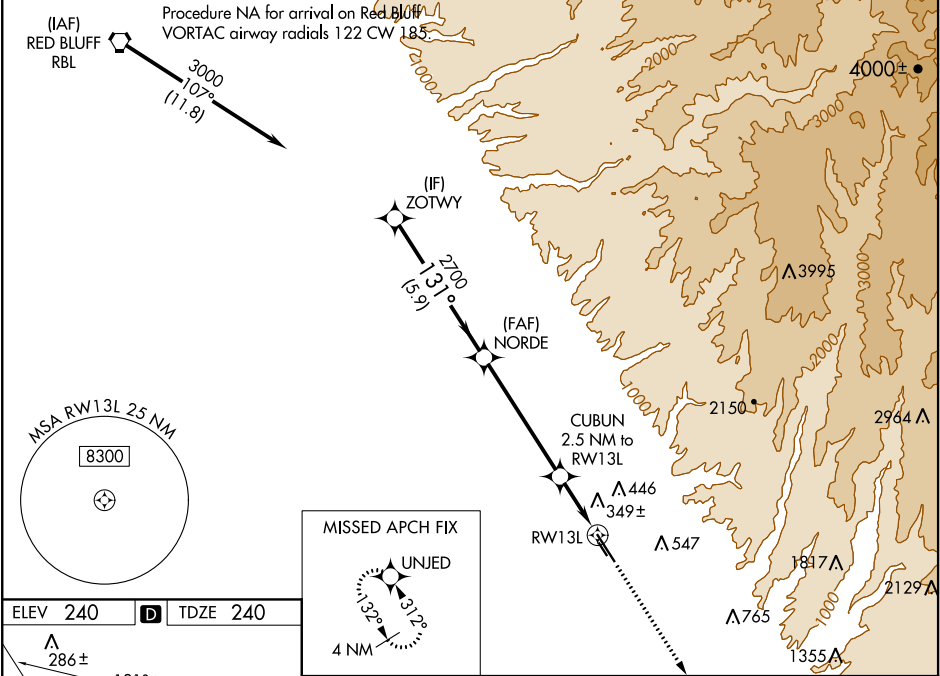

ZOTWY				NORDE		3600 ↑ UNJED ✦	
3000				2700		CUBUN 2.5 NM to RW13L	
GP 3.00° TCH 52				2700		*1080	
5.9 NM				5.1 NM		1.5 NM	
A				B		C	
D							
CATEGORY							
LPV DA	440-1/2			200 (200-1/2)			
LNAV/ VNAV	530-1/2			290 (300-1/2)			
LNAV MDA	600-1/2 360 (400-1/2)		600-5/8 360 (400-5/8)				
CIRCLING	640-1 400 (400-1)		700-1 460 (500-1)		700-1 1/2 460 (500-1 1/2)		800-2 560 (600-2)