
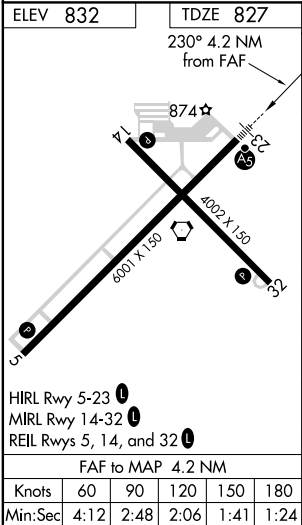



LOC I-OKK 108.9	APP CRS 230°	Rwy Idg 6001 TDZE 827 Apt Elev 832
--------------------	-----------------	---

ILS or LOC RWY 23
KOKOMO MUNI (OKK)

RADAR required for procedure entry.	MALSR	MISSED APPROACH: Climb to 1400 then climbing left turn to 2600 direct MZZ VOR/DME and hold.
NA For inop ALS, increase S-LOC 23 Cat C/D visibility to 1½ SM. * DME from OKK		

AWOS-3PT 113.5	GRISSEM APP CON* 121.05 338.275	CLNC DEL 120.0	UNICOM 123.0 (CTAF) 0
-------------------	------------------------------------	-------------------	--------------------------

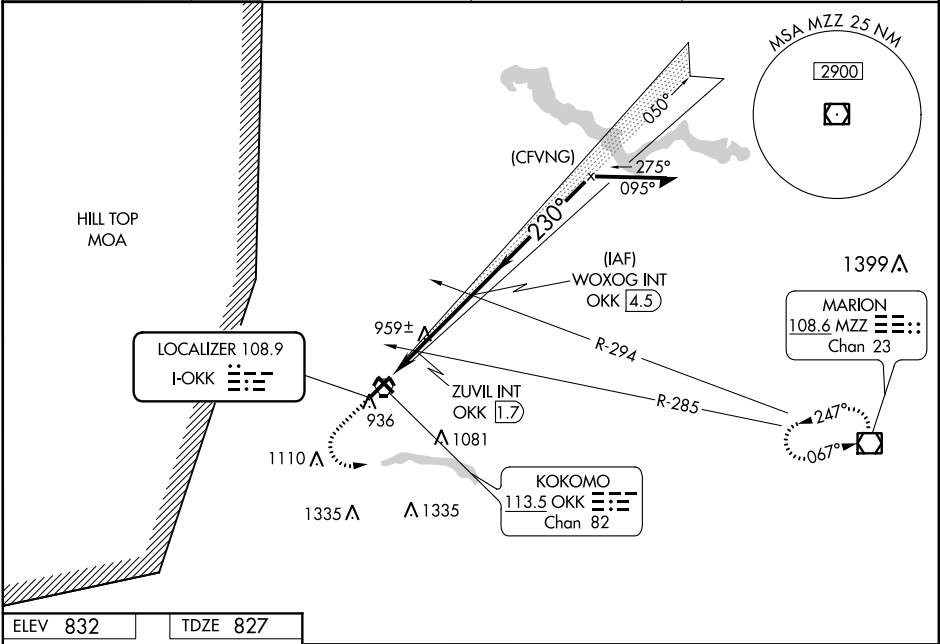

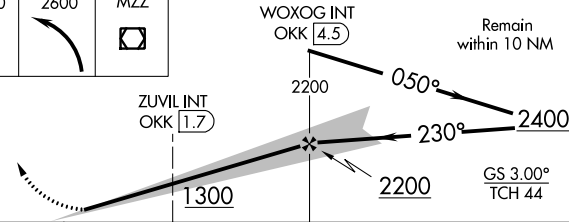1400	2600	MZZ				
						
						
CATEGORY	A	B	C	D		
S-ILS 23	1027-1/2 200 (200-1/2)					
S-LOC 23	1300-1/2 473 (500-1/2)		1300-1 473 (500-1)			
 CIRCLING	1300-1 468 (500-1)		1400-1 1/2 568 (600-1 1/2)		1420-2 588 (600-2)	
ZUVIL FIX MINIMUMS* (DUAL VOR RECEIVERS or DME REQUIRED)						
S-LOC 23	1220-1/2 393 (400-1/2)		1220-5/8 393 (400-5/8)			
 CIRCLING	1260-1 428 (500-1)	1300-1 468 (500-1)	1400-1 1/2 568 (600-1 1/2)		1420-2 588 (600-2)	