

WAAS CH 72630 W11A	APP CRS 111°	Rwy Idg TDZE 1152 Apt Elev 1171	5001 1152 1171
--	------------------------	---	---

RNAV (GPS) RWY 11


IOWA COUNTY (MRJ)

⚠

Baro-VNAV NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Platteville altimeter setting and increase all DA 55 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase all MDA 60 feet, and LNAV Cat C visibility ¼ mile. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 3600 direct YECNU and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

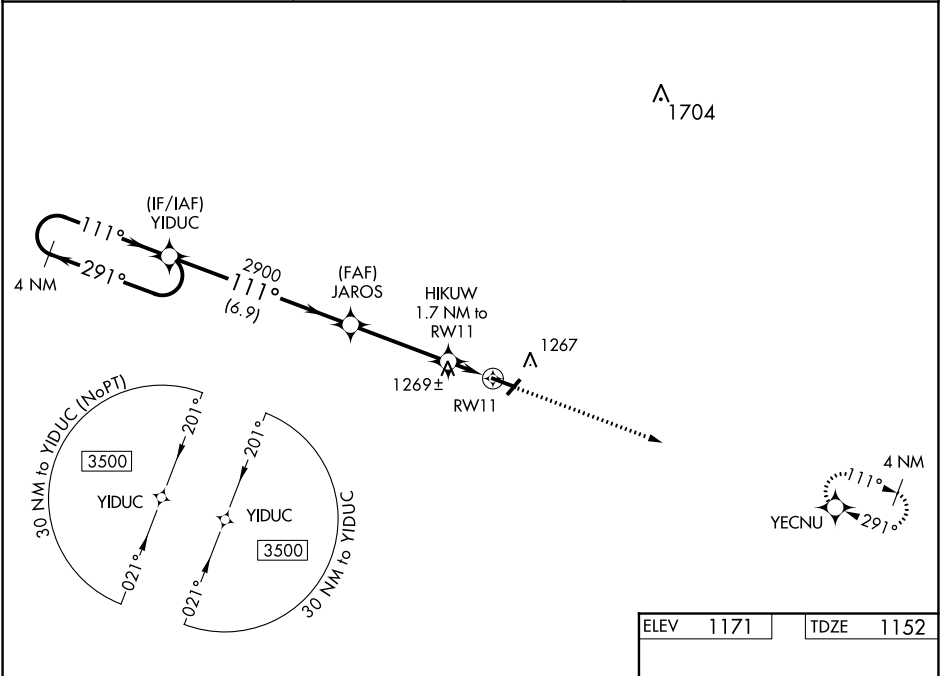

4 NM Holding Pattern		VGSI and RNP glidepath not coincident (VGSI Angle 3.00/TCH 61).		3600	YECNU
3500 ← 291° 111° →		JAROS 2900		HIKUW 1.7 NM to RW11	* LNAV only
GP 3.00° TCH 40		* 1700		* 1 NM to RW11	
		6.9 NM		3.7 NM	0.7 NM
CATEGORY	A	B	C	D	
LPV DA	1352-3/4	200 (200-3/4)		NA	
LNAV/VNAV DA	1402-7/8	250 (300-7/8)		NA	
LNAV MDA	1520-1	368 (400-1)	1520-1 1/8 368 (400-1 1/8)	NA	
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1 1/2 469 (500-1 1/2)	NA	

