


LOC/DME I-HCV	APP CRS	Rwy Idg	6215
110.3	052°	TDZE	947
Chan 40		Apt Elev	947

ILS or LOC RWY 5

WEST VIRGINIA INTL YEAGER (CRW)

▽ ▲		MISSED APPROACH: Climb to 1800 then climbing left turn to 3500 direct HVQ VOR/DME and hold.		
ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL
127.6	124.1 269.125	125.7 257.8	121.8 348.6	118.55

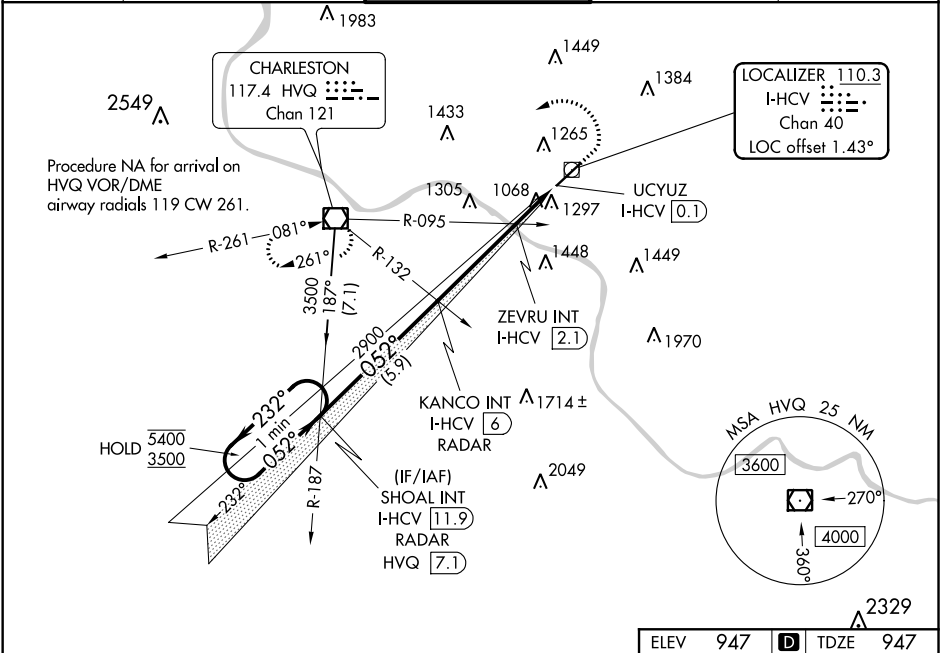

One Minute Holding Pattern		SHOAL INT I-HCV <u>11.9</u> RADAR	KANCO INT I-HCV <u>6</u> RADAR	* LOC only	1800 ↑	3500 ↷	HVQ ☐
5400 ← 232° 3500 → 052°		052°	2900	2900	ZEVRU INT I-HCV <u>2.1</u>	I-HCV DME ANTENNA	UCYUZ I-HCV <u>0.1</u>
GS 3.00° TCH 56			2900	*1640	*I-HCV <u>1.1</u>		
		5.9 NM		3.9 NM	1 NM	1 NM	0.1
CATEGORY	A	B	C	D			
S-ILS 5	1197/40		250 (300-¾)				
S-LOC 5	1640/55	693 (700-1)	1640-2		693 (700-2)		
C CIRCLING	1640-1	693 (700-1)	1760-2½ 813 (900-2½)		1880-3 933 (1000-3)		
ZEVRU FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)							
S-LOC 5	1320/55		373 (400-1)				
C CIRCLING	1600-1	653 (700-1)	1760-2½ 813 (900-2½)		1880-3 933 (1000-3)		

