WAAS CH 72918 W35A	APP CRS 350°	Rwy Idg 5002 TDZE 3278 Apt Elev 3315

RNAV (GPS) RWY 35
GAINES COUNTY (GNC)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Midland Intl Air and Space Port altimeter setting and increase LPV DA to 3704 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 3767 feet and all visibilities ¾ SM; increase all MDAs 180 feet and visibility LNAV and Circling Cat C ½ SM. Baro-VNAV and VDP NA when using Midland Intl Air and Space Port altimeter setting.

MISSED APPROACH: Climb to 6000 direct OSHWA and hold, continue climb-in-hold to 6000.

AWOS-3	FORT WORTH CENTER	UNICOM
118.075	132.6 269.05	122.8 (CTAF) L

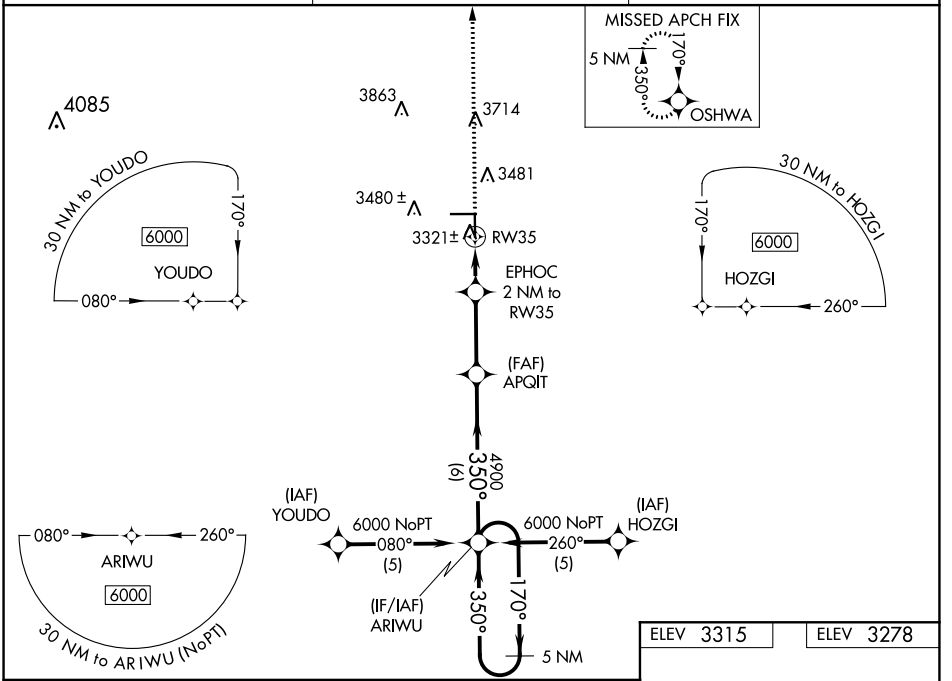

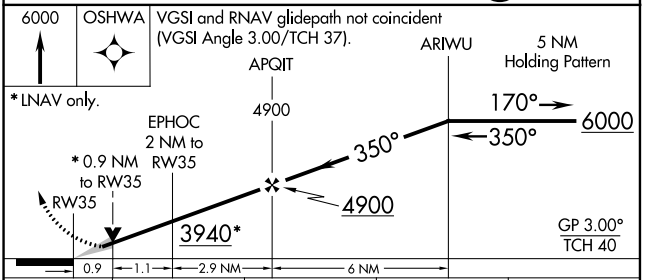

CATEGORY	A	B	C	D
LPV DA	3528-1 250 (300-1)			NA
LNAV/VNAV DA	3591-1¼ 313 (300-1¼)			NA
LNAV MDA	3580-1 302 (300-1)			NA
CIRCLING	3840-1 525 (600-1)	3880-1 565 (600-1)	3940-1¾ 625 (700-1¾)	NA

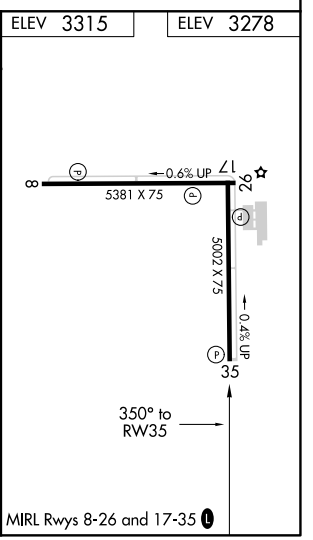

SC-2, 16 JUN 2022 to 14 JUL 2022
SC-2, 16 JUN 2022 to 14 JUL 2022