

WAAS CH 40309 W20A	APP CRS 199°	Rwy Idg 5002 TDZE 387 Apt Elev 390
--	------------------------	---


RNAV (GPS) RWY 20

SALINE COUNTY RGNL (SUZ)

T Baro-VNAV NA DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Use Bill and Hillary Clinton Ntl/Adams Fld altimeter setting; when not received, use Hot Springs altimeter setting; increase LPV DA to 868 feet and all visibilities $\frac{1}{4}$ SM; increase LNAV/VNAV DA to 1371 feet and Cat C visibility $\frac{1}{4}$ SM; increase all MDAs 60 feet and increase LNAV and Circling Cat C/D visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 2000 direct UCICE and via 222° track to MALVE and hold.

AWOS-3 132.125	LITTLE ROCK APP CON 119.5 306.2	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

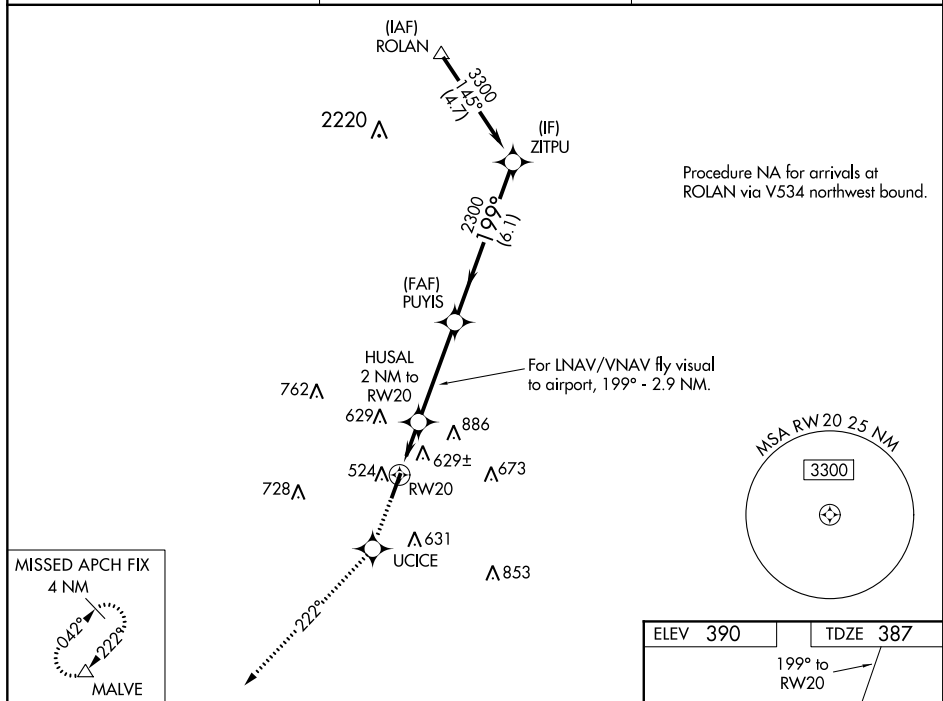

2000 ↑	UCICE ✱	222° tr	MALVE △	For LNAV/VNAV fly visual to airport, 199° - 2.9 NM.				
*LNAV only.				ZITPU 3300				
HUSAL 2 NM to RW20 PUYIS 199° 2300 Procedure Turn NA GP 3.00° TCH 34								
CATEGORY		A		B		C		D
LPV DA		827-1½ 440 (500-1½)						
LNAV/ VNAV DA		1330-2	943 (1000-2)	1330-2¾ 943 (1000-2¾)		1330-3 943 (1000-3)		
LNAV MDA		960-1	573 (600-1)	960-1½ 573 (600-1½)		960-1¾ 573 (600-1¾)		
CIRCLING		1000-1 610 (700-1)	1140-1¼ 750 (800-1¼)	1240-2½ 850 (900-2½)		1240-2¾ 850 (900-2¾)		

