

WAAS CH 82308 W21A	APP CRS 207°	Rwy Idg 5500 TDZE 1276 Apt Elev 1276
--	------------------------	---


RNAV (GPS) RWY 21
EPHRATA MUNI (EPH)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C .
▲ VDP and Baro-VNAV NA when using Moses Lake/Grant County Intl altimeter setting. When local altimeter setting not received, use Moses Lake/Grant County Intl altimeter setting and increase all DA/MDA 40 feet; increase visibility LPV all Cats, and LNAV Cats C and D ¼ SM.

MISSED APPROACH: Climb to 4500 direct UDECU and hold.

ASOS 135.775	GRANT COUNTY APP CON ★ 126.4 379.95	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

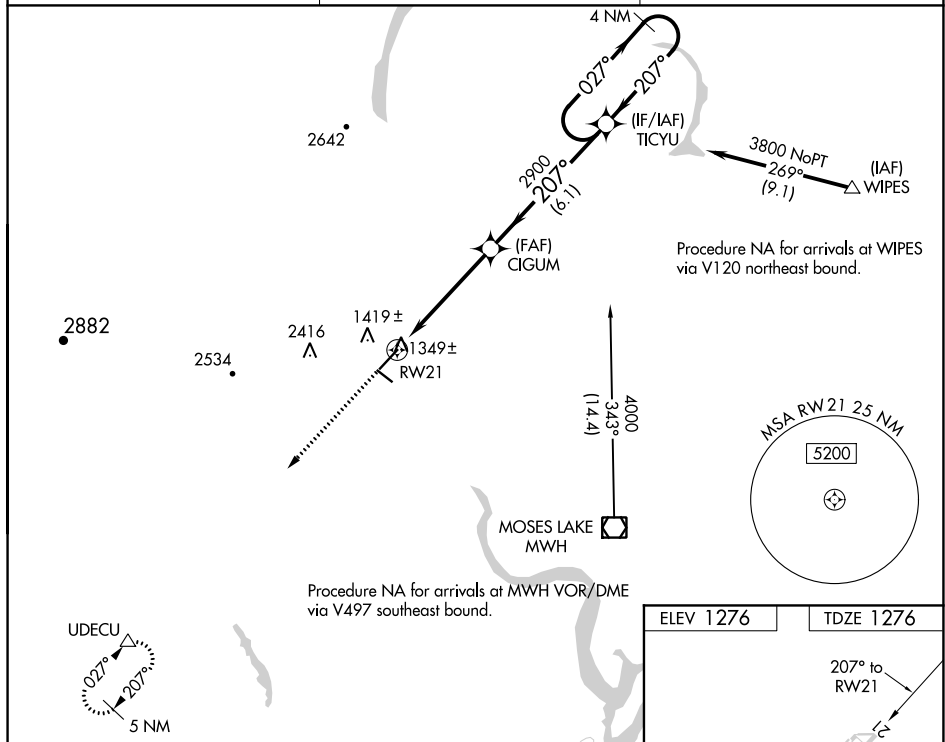

4500 UDECU VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 40). 4 NM Holding Pattern TICU 027° 207° 3800 *RNAV only *2.2 NM to RW21 2.2 NM 2.7 NM 6.1 NM GP 3.00° TCH 51

CATEGORY	A	B	C	D
LPV DA	1526-3/4 250 (300-3/4)			
RNAV/VNAV DA	2171-4 895 (900-4)			
RNAV MDA	2020-1 744 (800-1)	2020-1 1/4 744 (800-1 1/4)	2020-2 1/4 744 (800-2 1/4)	2020-2 1/2 744 (800-2 1/2)

