

WAAS CH 72901 W30B	APP CRS 306°	Rwy Idg 7597 TDZE 55 Apt Elev 62
--	------------------------	---

RNAV (GPS) Y RWY 30R


NORMAN Y MINETA SAN JOSE INTL (SJC)

RNP APCH-GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C.

MISSED APPROACH: Climb to 2300 direct MUSSK and hold.

D-ATIS 126.95	NORCAL APP CON 120.1 290.25	SAN JOSE TOWER ★ 124.0 (CTAF) 0 257.6	GND CON 121.7	CLNC DEL 118.0	CPDLC	UNICOM 122.95
-------------------------	---------------------------------------	--	-------------------------	--------------------------	-------	-------------------------

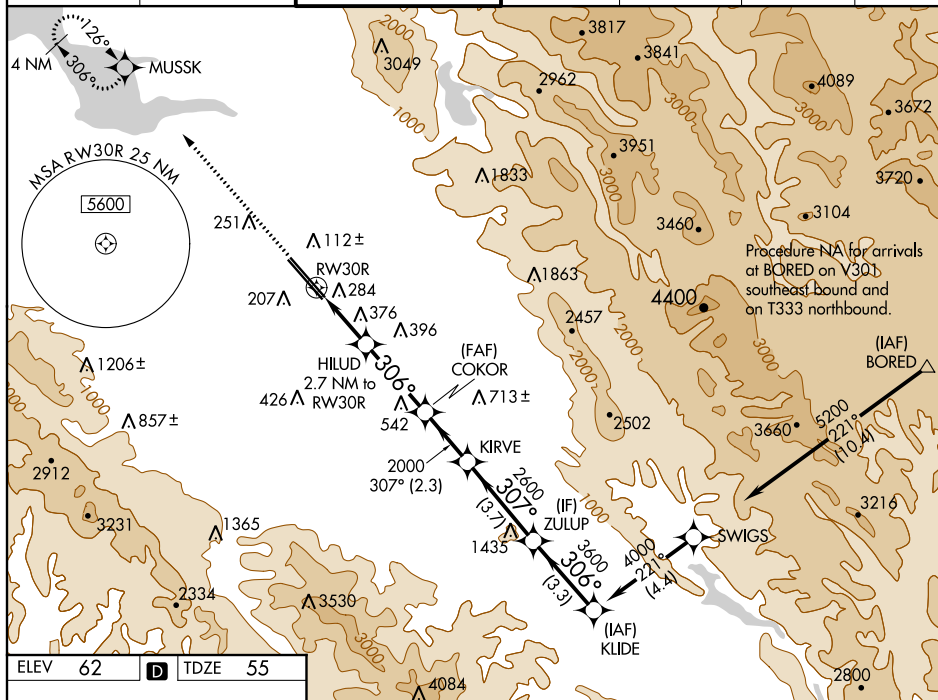

ELEV	62		TDZE	55
------	----	---	------	----

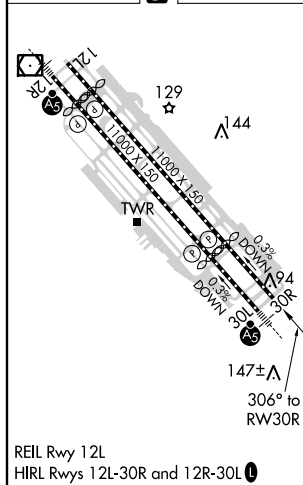

VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 69).

2300 ↑ MUSSK

HILUD 2.7 NM to RW30R

COKOR 2000

KIRVE

ZULUP

KUDE 4000

1.6 NM to RW30R

306°

307°

306°

960

2000

2600

3600

GP 3.00° TCH 55

1.6 NM 1.1 NM 3.2 NM 2.3 NM 3.7 NM 3.3 NM

CATEGORY A B C D

LPV DA 255-3/4 200 (200-3/4)

LNNAV/VNAV DA 541-1 3/8 486 (500-1 3/8)

LNNAV MDA 640-1 585 (600-1) 640-1 3/4 585 (600-1 3/4)

CIRCLING 640-1 578 (600-1) 700-1 638 (700-1) 700-1 3/4 638 (700-1 3/4) 700-2 638 (700-2)