

WAAS CH 49011	APP CRS 091°	Rwy Idg TDZE 695	7000
W09A		Apt Elev 703	



RNAV (GPS) RWY 9

HAGERSTOWN RGNL/RICHARD A HENSON FLD (HGR)

⚠ Rwy 20 helicopter visibility reduction below 1 SM NA. Circling Rwy 20 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Martinsburg altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats and LNAV Cats C-D and Circling Cat D visibility ¼ mile. Baro-VNAV and VDP NA with Martinsburg altimeter setting.

MISSED APPROACH:
Climb to 4000 direct HAIGS and hold.

ASOS 126.375	POTOMAC APP CON 126.825 239.025	HAGERSTOWN TOWER ★ 120.3 (CTAF) 0 225.4	GND CON 120.8	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

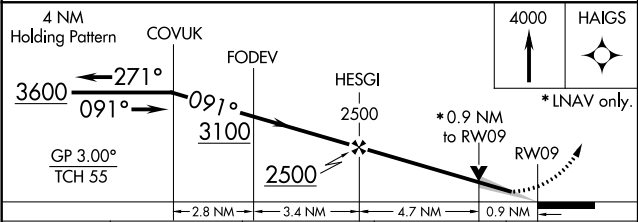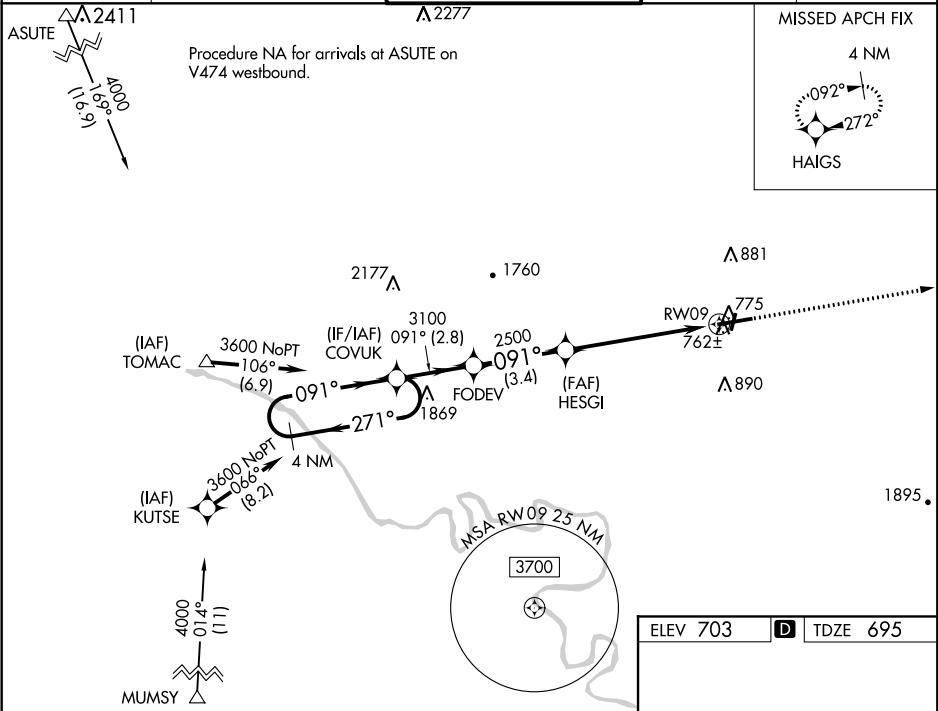

CATEGORY	A	B	C	D
LPV DA		895-¾ 200 (200-¾)		
LNAV/VNAV DA		954-¾ 259 (300-¾)		
LNAV MDA		1020-1 325 (400-1)		
CIRCLING	1160-1 457 (500-1)	1200-1½ 497 (500-1½)	1320-2 617 (700-2)	

ELEV 703

TDZE 695

REIL Rwy 2 and 20
REIL Rwy 9
MIRL Rwy 2-20
HIRL Rwy 9-27