
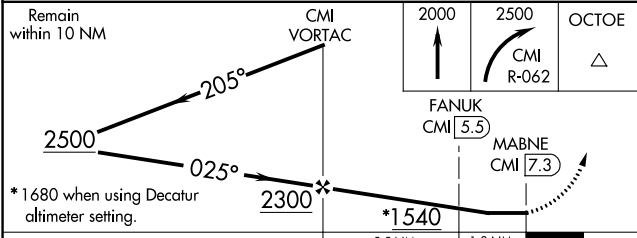


VORTAC CMI	APP CRS	Rwy Idg	N/A
110.0	025°	TDZE	N/A
Chan 37		Apt Elev	735


VOR-A
FRASCA FLD (C16)

V Circling NA to Rwy's 18 and 36. Use Champaign altimeter setting; when not received, use Decatur altimeter setting and increase all MDAs 80 feet and Cats A/B/D visibilities ¼ SM, Cat C visibility ½ SM; increase FANUK DME fix minimums Cats C/D visibility ¼ SM. NA	MISSED APPROACH: Climb to 2000 then climbing right turn to 2500 on CMI VORTAC R-062 to OCTOE INT and hold.
---	---

CHAMPAIGN APP CON ★ 121.35 285.65	UNICOM 122.8 (CTAF)
--------------------------------------	------------------------

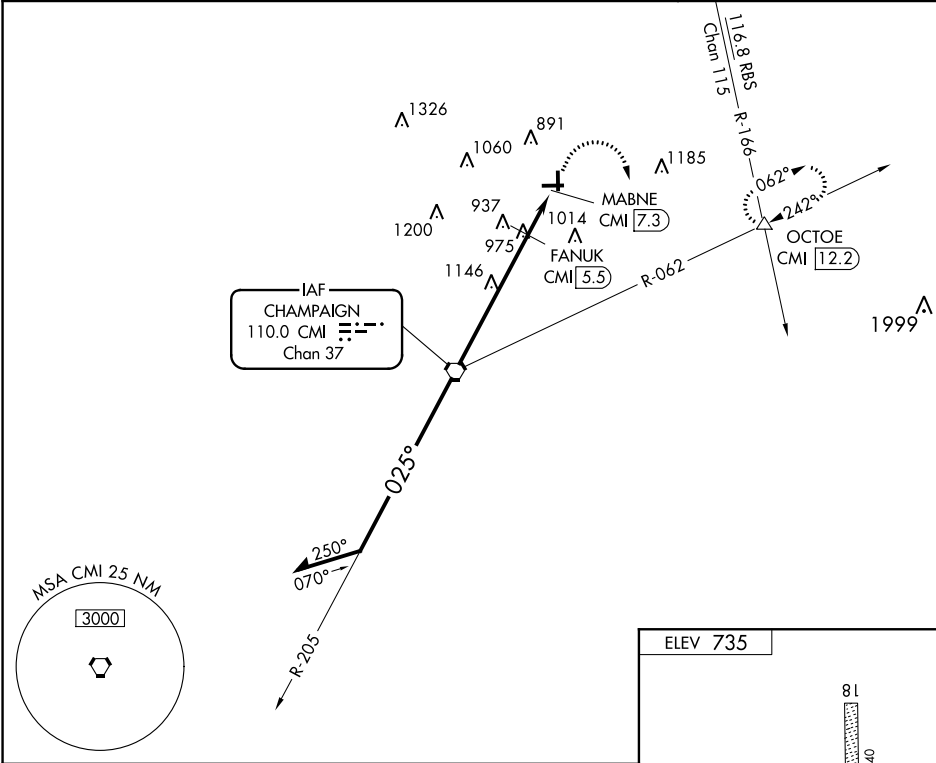

Remain within 10 NM	CMI VORTAC	2000	2500	OCTOE
		FANUK CMI (5.5)	MABNE CMI (7.3)	
		5.5 NM	1.8 NM	
CATEGORY	A	B	C	D
CIRCLING	1540-1 805 (900-1)	1540-1¼ 805 (900-1¼)	1540-2¼ 805 (900-2¼)	1560-2¾ 825 (900-2¾)
FANUK DME FIX MINIMUMS				
CIRCLING	1300-1	565 (600-1)	1420-2 685 (700-2)	1560-2¾ 825 (900-2¾)

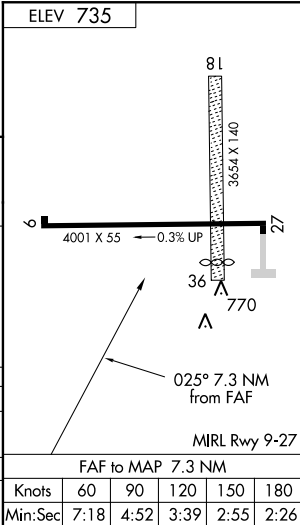

EC-3, 11 AUG 2022 to 08 SEP 2022

EC-3, 11 AUG 2022 to 08 SEP 2022