

WAAS
CH **82216**
W13A

APP CRS
127°

Rwy Idg
TDZE **135**
Apt Elev **135**

RNAV (GPS) RWY 13L

REID-HILLVIEW OF SANTA CLARA COUNTY (RHY)


RNP APCH.

NA

Circling Rwy 31L NA at night. Rwy 13L helicopter visibility reduction below ¾ SM NA. VDP NA with Norman Y Mineta San Jose Intl altimeter setting. When control tower closed, use Norman Y Mineta San Jose Intl altimeter setting and increase all DAs 25 feet and all MDAs 40 feet; increase LPV# visibility to 1¾ SM. Circling east of Rwy 13L-31R NA at night.

MISSED APPROACH: Climb to 1900 then climbing right turn to 5000 direct GILRO and hold.
#Missed approach requires minimum climb of 300 feet per NM to 2800.

ATIS 125.2	NORCAL APP CON 120.1 290.25	REID-HILLVIEW TOWER ★ (Rwy 13L-31R) (Rwy 13R-31L) 119.8 (CTAF) 126.1	GND CON 121.65	UNICOM 122.95
----------------------	---------------------------------------	---	--------------------------	-------------------------

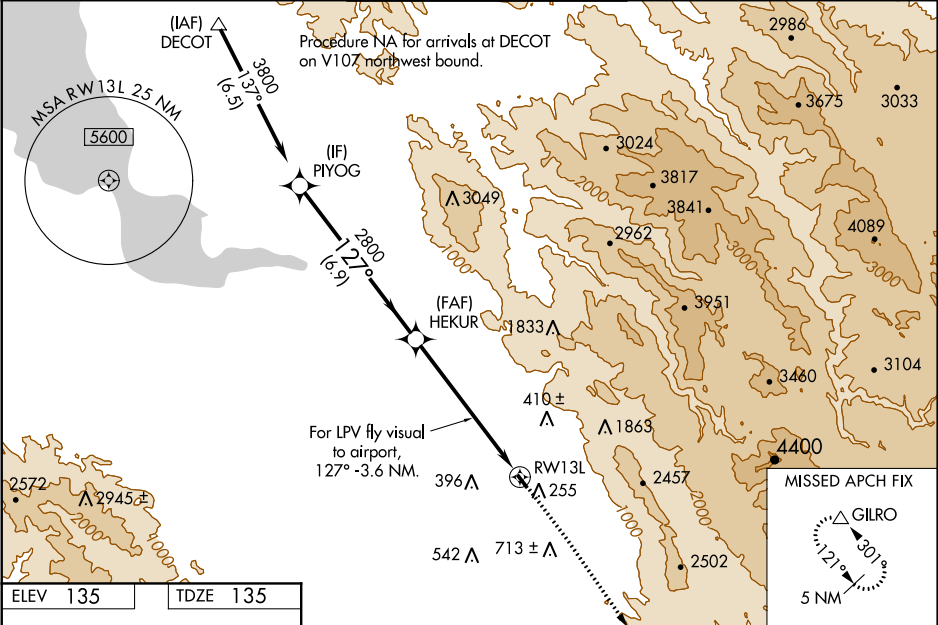

ELEV 135

TDZE 135

127° to RWY13L

Λ 232 ±

☆ 176

TWR 187

MIRL Rwy 13L-31R

REIL Rwy 13L and 31R

PIYOG

HEKUR

* LNAV only.

1900

5000

GILRO

For LPV fly visual to RWY13L

GP 4.00°

TCH 45

6.9 NM

4.2 NM

2 NM

CATEGORY	A	B	C	D
LPV DA#	562-1¼	427 (500-1¼)	NA	NA
LPV DA	1708-3	1573 (1600-3)	NA	NA
LNAV MDA#	1040-1¼	905 (1000-1¼)	NA	NA
LNAV MDA	1600-1¼ 1465 (1500-1¼)	1600-1½ 1465 (1500-1½)	NA	NA
CIRCLING	1600-1¼ 1465 (1500-1¼)	1600-1½ 1465 (1500-1½)	NA	NA