

APP CRS
230°

Rwy Idg
TDZE
Apt Elev

5001
74
74

RNAV (GPS) RWY 23

BERKELEY COUNTY (MKS)

RNP APCH-GPS


Procedure NA at night. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Charleston AFB/Intl altimeter setting: increase all MDA 60 feet and increase LNAV Cat C/D and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct WILRO and via 304° track to GRECI and hold.

AWOS-3
119.175

CHARLESTON APP CON
119.3 379.925

UNICOM
123.05 (CTAF) 0

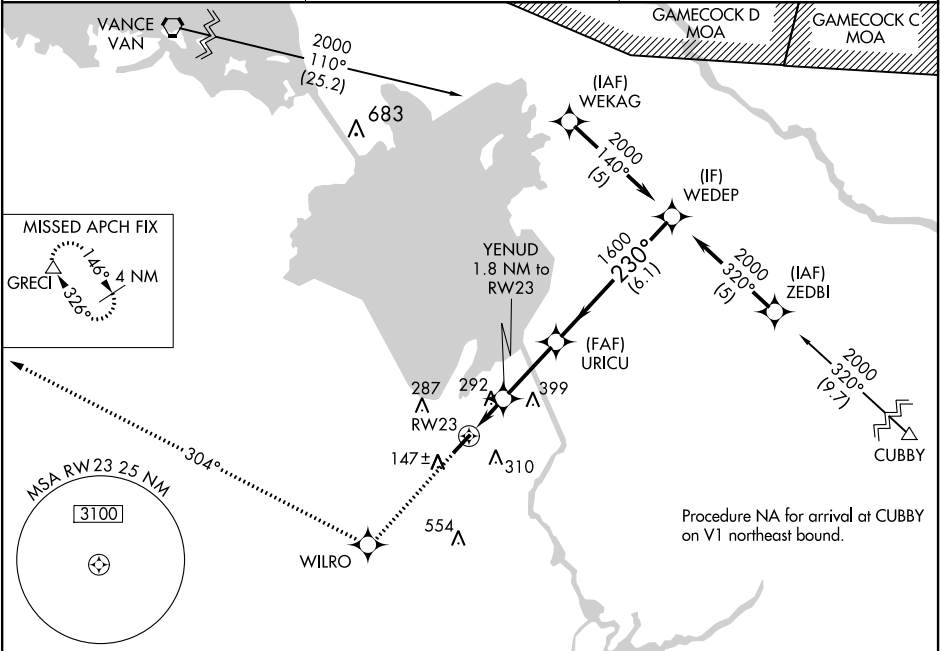

ELEV 74

TDZE 74

230° to RW23

5001 x 75

2000

WILRO

304° tr

GRECI

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 44).

WEDEP

URICU

YENUD 1.8 NM to RW23

680

1600

230°

2000

1.8 NM

2.8 NM

6.1 NM

CATEGORY	A	B	C	D
LNAV MDA	560-1	486 (500-1)	560-1¼ 486 (500-1¼)	560-1½ 486 (500-1½)
CIRCLING	580-1 506 (600-1)	620-1 546 (600-1)	700-1¾ 626 (700-1¾)	860-2½ 786 (800-2½)

MIRL Rwy 5-23 0