

WAAS CH 78135 W18A	APP CRS 179°	Rwy Idg TDZE Apt Elev	6000 1350 1350
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

FRENCH VALLEY (F70)


▼

NA

DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA with Ramona altimeter setting. Circling NA west of Rwy 18-36. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received use Ramona altimeter setting: increase LPV DA to 1685 feet and all visibilities ¼ mile, LNAV/VNAV DA to 1955 feet and all visibilities ¾ mile, all MDA 80 feet and LNAV visibility Cat B ¼ mile, Cat C ½ mile, and Circling visibility Cat C ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2500 then climbing right turn to 5000 direct JESEX and hold.

AWOS-3 119.025	MARCH APP CON ★ 133.5 600.975	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

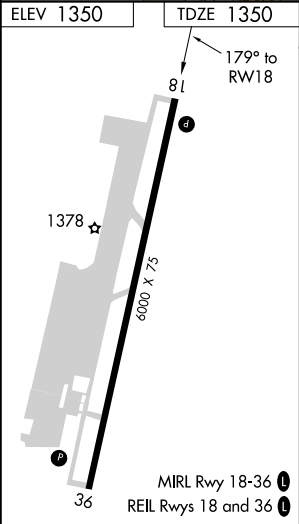

2500	5000	JESEX				
						
* LNAV only			DISEY 3.8 NM to RW18			
			DANNN 3500			
			ECULU			
			TIQMU			
			5 NM Holding Pattern			
			359° → 4600			
			← 179°			
			GP 3.00° TCH 40			
			2600*			
			3500			
			3800			
			179°			
			1.2 NM			
			2.6 NM			
			2.8 NM			
			2.2 NM			
			5.1 NM			
CATEGORY		A	B	C	D	
LPV DA	1600-78		250 (300-78)	NA		
LNAV/ VNAV DA	1871-134		521 (600-134)	NA		
LNAV MDA	1780-1	430 (500-1)	1780-1¼ 430 (500-1¼)	NA		
 CIRCLING	2020-1	670 (700-1)	2060-2 710 (800-2)	NA		