

LOC/DME I-ALB	APP CRS	Rwy Idg	8500
109.5	191°	TDZE	280
Chan 32		Apt Elev	285

ILS or LOC RWY 19

ALBANY INTL (ALB)


⚠

Circling NA west of Rwy 1-19.
Circling Rwy 10 NA at night.
DME or RADAR required.

MALSR

MISSED APPROACH: Climb to 2000
then climbing left turn to 5000 direct
CAM VOR/DME and hold.

D-ATIS 120.45	ALBANY APP CON 132.825 307.2	ALBANY TOWER 119.5 257.8	GND CON 121.7 348.6	CLNC DEL 127.50
-------------------------	--	------------------------------------	-------------------------------	---------------------------

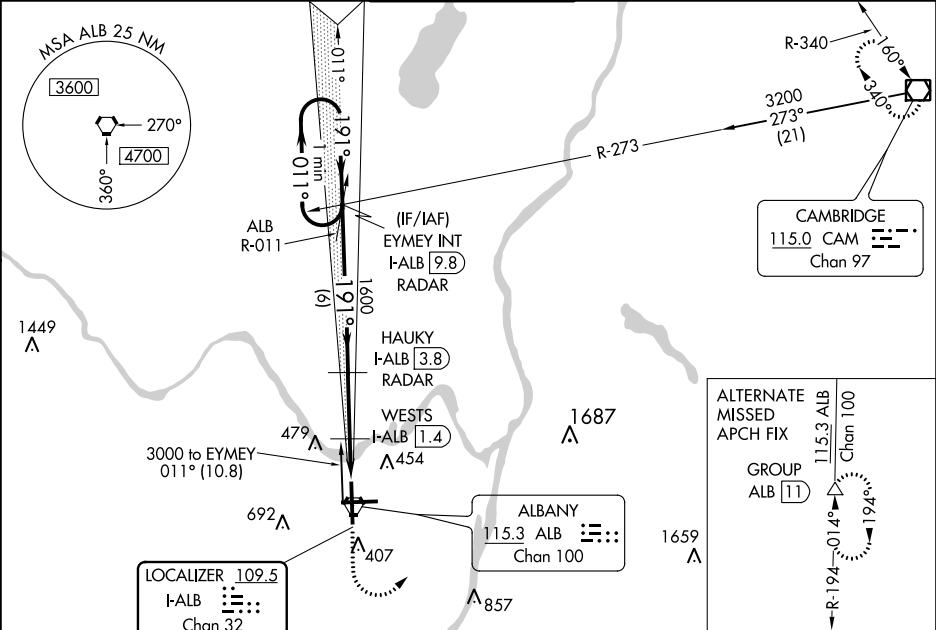

One Minute Holding Pattern

EYMEY INT I-ALB 9.8 RADAR

HAUKY I-ALB 3.8 RADAR

WESTS I-ALB 1.4

2000

011°

191°

191°

1600

1600

820

6 NM

2.4 NM

0.7 NM

0.9

GS 3.00° TCH 54

Use I-ALB DME when on the localizer course.

* LOC only.

2000

5000

CAM

CATEGORY	A	B	C	D
S-ILS 19	480/18 200 (200-½)			
S-LOC 19	820/24	540 (600-½)	820/55	540 (600-1)
CIRCLING	820-1	535 (600-1)	860-1½ 575 (600-1½)	960-2¼ 675 (700-2¼)
WESTS FIX MINIMUMS				
S-LOC 19	620/24	340 (400-½)	620/26	340 (400-½)
CIRCLING	820-1	535 (600-1)	820-1½ 535 (600-1½)	960-2¼ 675 (700-2¼)

ELEV 285

TDZE 280

191° 4 NM from FAF

TWR 399

7200 X 150

TDZ/CL Rwy 1

HIRL Rwy 1-19

MIRL Rwy 10-28

REIL Rwys 10 and 28

FAF to MAP 4 NM

Knots	60	90	120	150	180
Min:Sec	4:00	2:40	2:00	1:36	1:20