

LOC/DME I-CJL 110.75 Chan 44 (Y)	APP CRS 164°	Rwy Idg TDZE Apt Elev	8500 415 432
--	------------------------	-----------------------------	---

ILS RWY 16R (SA CAT I)
SEATTLE-TACOMA INTL (SEA)



DME or RADAR required. From GRIFY: RNAV 1-GPS required.

T Simultaneous approach authorized with Rwy 16L and 16C. Simultaneous operations require use of vertical guidance, maintain last assigned altitude until established on glideslope. Requires specific OPSPEC, MSPEC or LOA approval and use of HUD to DH.

ALSF-2


MISSED APPROACH: Climb to 900 then climb on heading 195° and on SEA VORTAC R-210 to cross TEECE/SEA 3 DME/RADAR at or below 2000 then climb to 5000 on SEA VORTAC R-210 to ZERU/SEA 15 DME/RADAR and hold, continue climb-in-hold to 5000.

D-ATIS 118.0	SEATTLE APP CON 133.65 273.45	SEATTLE TOWER 119.9 239.3 (Rwys 16L, 16C, 34C, 34R) 120.95 239.3 (Rwys 16R, 34L)	GND CON 121.7	CLNC DEL 128.0	CPDLC
-----------------	----------------------------------	--	------------------	-------------------	-------

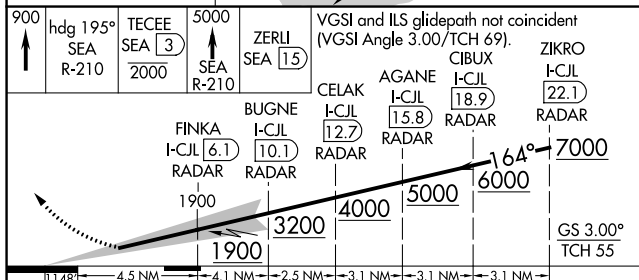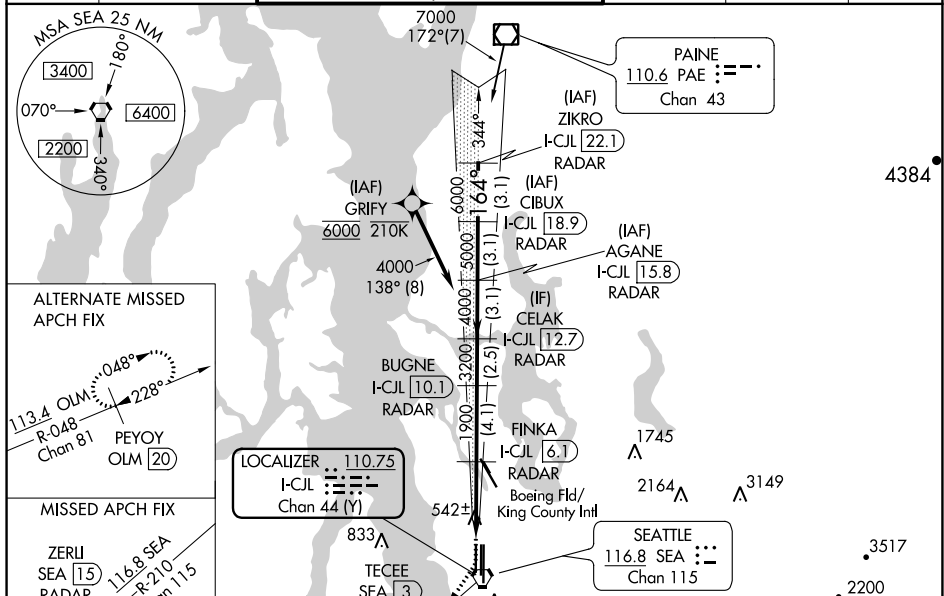

CATEGORY	A	B	C	D
S-ILS 16R	RA 176/14 150 DA 565			

SA CAT I ILS-SPECIAL AIRCREW &
AIRCRAFT CERTIFICATION REQUIRED

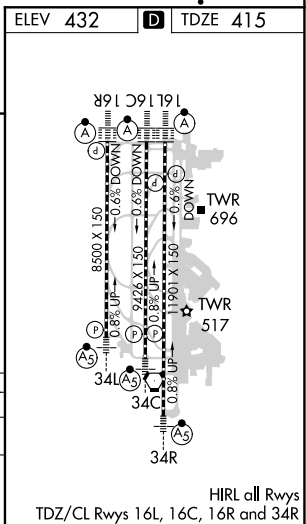

ILS RWY 16R (SA CAT I)