

| | | |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS CH 90216 W27A | APP CRS 274° | Rwy Idg 5390 TDZE 552 Apt Elev 569 |
|----------------------------------------|------------------------|---------------------------------------------------------------|


RNAV (GPS) RWY 27

MERKEL FLD SYLACAUGA MUNI (SCD)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 48°C (118°F). Baro-VNAV and VDP NA when using Birmingham altimeter setting.
 ▲ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Birmingham altimeter setting and increase LPV DA to 889 feet, LNAV/VNAV DA to 1161 feet, and all visibilities 3/8 mile. Increase all MDA 100 feet and LNAV Cat C and D visibilities 1/4 mile.

MISSED APPROACH:
Climb to 3200 direct GOKYE and hold.

| | | |
|----------------------------|------------------------------------------|---------------------------------|
| AWOS-3PT 119.125 | BIRMINGHAM APP CON 123.8 256.8 | UNICOM 122.8 (CTAF) 0 |
|----------------------------|------------------------------------------|---------------------------------|

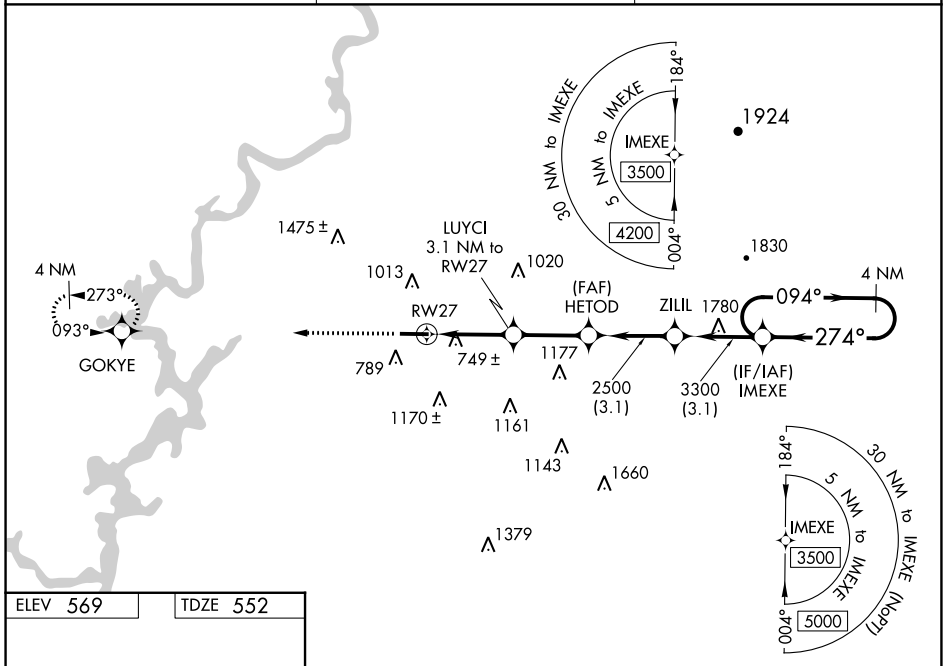

| | |
|----------|----------|
| ELEV 569 | TDZE 552 |
|----------|----------|

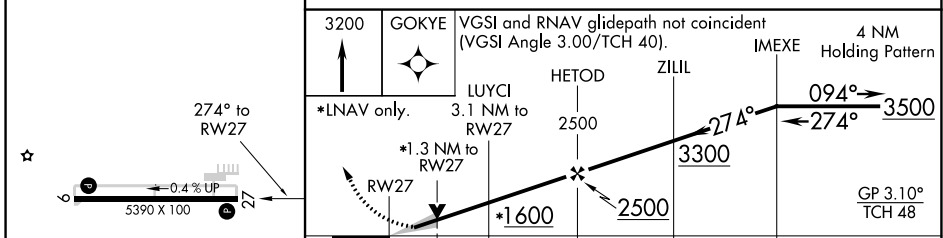

| CATEGORY | A | B | C | D |
|----------------------------------------------|-----------------------|-----------------------------|--------------------------|-------------------------|
| LPV DA | 802-3/4 | | 250 (300-3/4) | |
| LNAV/VNAV DA | 1074-13/4 | | 522 (600-13/4) | |
| LNAV MDA | 1000-1 448 (500-1) | | 1000-13/8 448 (500-13/8) | |
| <input checked="" type="checkbox"/> CIRCLING | 1140-1 571 (600-1) | 1400-11/4 831 (900-11/4) | 1620-3 1051 (1100-3) | 1700-3 1131 (1200-3) |

MIRL Rwy 9-27 0
REIL Rwy 9 and 27 0

SE-4, 01 DEC 2022 to 29 DEC 2022

SE-4, 01 DEC 2022 to 29 DEC 2022