

WAAS CH 86603 W20A	APP CRS 200°	Rwy Idg 5000 TDZE 3132 Apt Elev 3134
--	------------------------	---

RNAV (GPS) RWY 20


HUGOTON MUNI (HQQ)

RNP APCH-GPS.

Circling Rwy 13, 31 NA at night. Rwy 20 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C.

MISSED APPROACH: Climb to 5000 direct OVAME and hold.

AWOS-3PT 118.6	KANSAS CITY CENTER 134.0 257.625	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

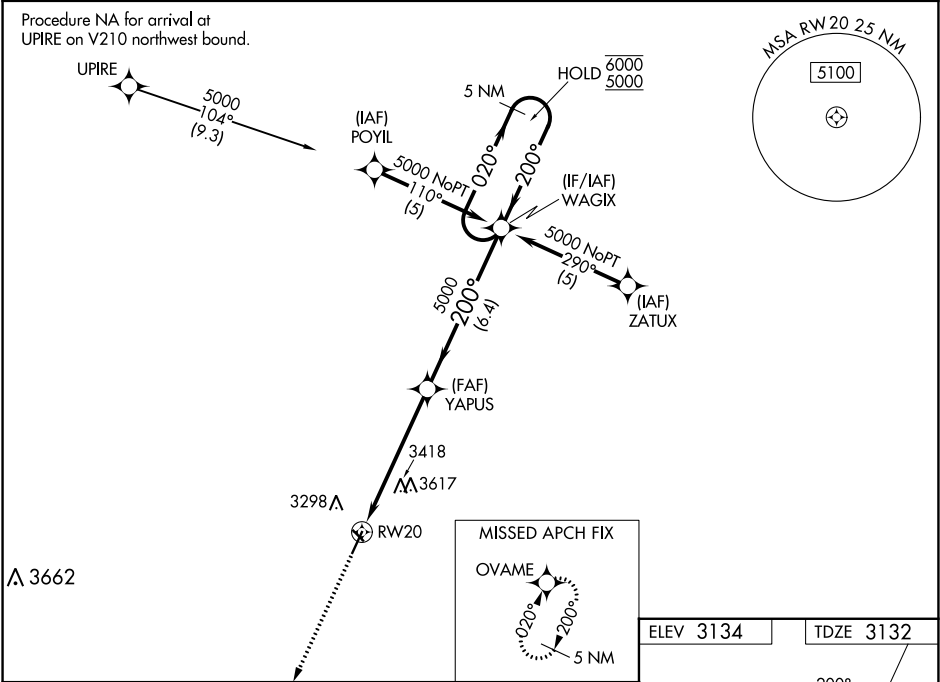

5000

↑

OVAME

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).

	YAPUS	WAGIX	5 NM Holding Pattern
	5000	5000	6000/5000
	2.2 NM to RW20	200°	020°
		5000	GP 3.00° TCH 45
	2.2 NM	3.5 NM	6.4 NM

CATEGORY	A	B	C	D
LPV DA	3382-1	250 (300-1)		NA
LNAV/VNAV DA	3580-1⅜	448 (500-1⅝)		NA
LNAV MDA	3860-1 728 (800-1)	3860-2 728 (800-2)		NA
CIRCLING	3860-1 726 (800-1)	3980-2½ 846 (900-2½)		NA

