

|               |         |          |      |
|---------------|---------|----------|------|
| LOC/DME I-FQD | APP CRS | Rwy Idg  | 5000 |
| 109.55        | 009°    | TDZE     | 1059 |
| Chan 32(Y)    |         | Apt Elev | 1077 |

LOC RWY 1



RUTHERFORD COUNTY/MARCHMAN FLD (FQD)

▼ VDP NA with Shelby-Cleveland County Rgnl altimeter setting. When local altimeter setting not received, use Shelby-Cleveland County Rgnl altimeter setting and increase all MDA 80 feet and S-1 Cat C and D and Circling Cat C visibilities  $\frac{1}{8}$  mile; increase Circling Cat D visibility  $\frac{1}{4}$  mile. DASCFA fix minimums: Increase S-1 Cat C and D and Circling Cat C and D visibilities  $\frac{1}{4}$  mile.

▲ NA

MISSED APPROACH: Climb to 1800 then climbing left turn to 3000 on heading 165° and on I-FQD localizer south course to EPOZI INT/I-FQD 12.8 DME and hold.

|         |                 |                |
|---------|-----------------|----------------|
| AWOS-3  | GREER APP CON ★ | UNICOM         |
| 118.275 | 119.4 350.2     | 122.8 (CTAF) 0 |

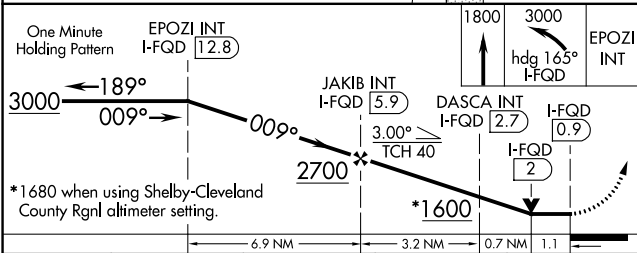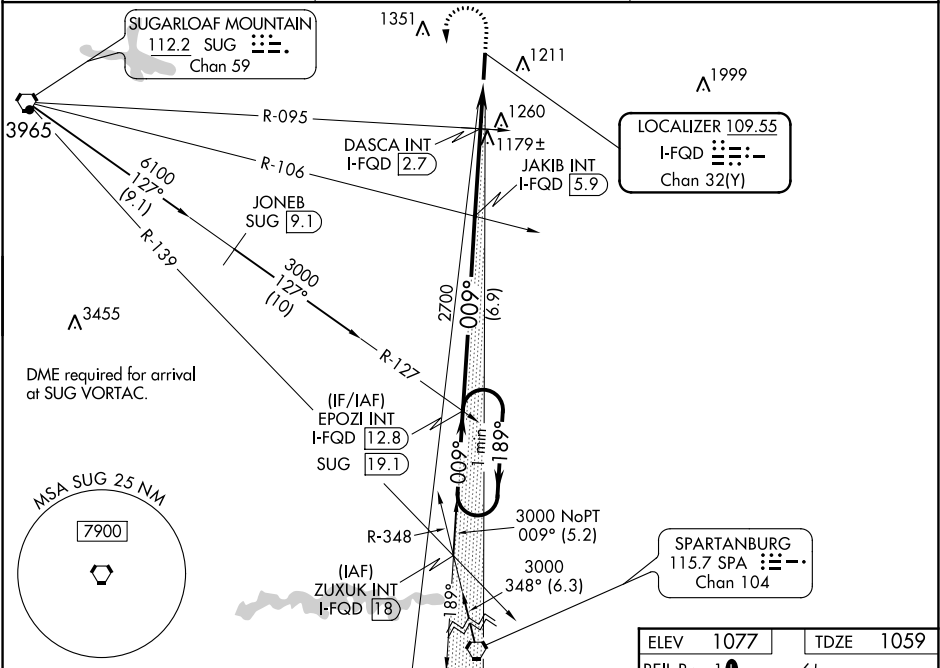

| CATEGORY                                                 | A                     | B                     | C                       | D                       |
|----------------------------------------------------------|-----------------------|-----------------------|-------------------------|-------------------------|
| S-1                                                      | 1600-1                | 541 (600-1)           | 1600-1½                 | 541 (600-1½)            |
| ◻ CIRCLING                                               | 1600-1<br>523 (600-1) | 1620-1<br>543 (600-1) | 1640-1½<br>563 (600-1½) | 1820-2½<br>743 (800-2½) |
| DASCFA FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) |                       |                       |                         |                         |
| S-1                                                      | 1440-1                | 381 (400-1)           | 1440-1½                 | 381 (400-1½)            |
| ◻ CIRCLING                                               | 1560-1<br>483 (500-1) | 1620-1<br>543 (600-1) | 1640-1½<br>563 (600-1½) | 1820-1½<br>743 (800-1½) |

