

LOC I-RGK 110.1	APP CRS 091°	Rwy Idg TDZE Apt Elev 5010 778 778
---------------------------	------------------------	--


ILS or LOC RWY 9
RED WING RGNL (RGK)

ADF Required. When local alimeter setting not received, use South St. Paul alimeter setting; increase S-ILS 9 DA to 1050 feet; increase all MDA 80 feet and visibility S-LOC 9 Cat C/D 1/8 SM and Circling Cat B/C 1/4 SM. For inop MALSRL, increase S-LOC 9 Cat C/D visibility 1/4 mile. For inop MALSRL when using South St. Paul alimeter setting, increase S-ILS 9 all Cats visibility 3/8 mile, and S-LOC 9 Cat C/D visibility 3/4 mile.

MALSRL

MISSED APPROACH:
Climb to 2000 then climbing right turn to 3000 direct REGUE LOM and hold.

AWOS-3 119.25	MINNEAPOLIS APP CON 121.2 335.65	UNICOM 123.05 (CTAF)
-------------------------	--	--------------------------------

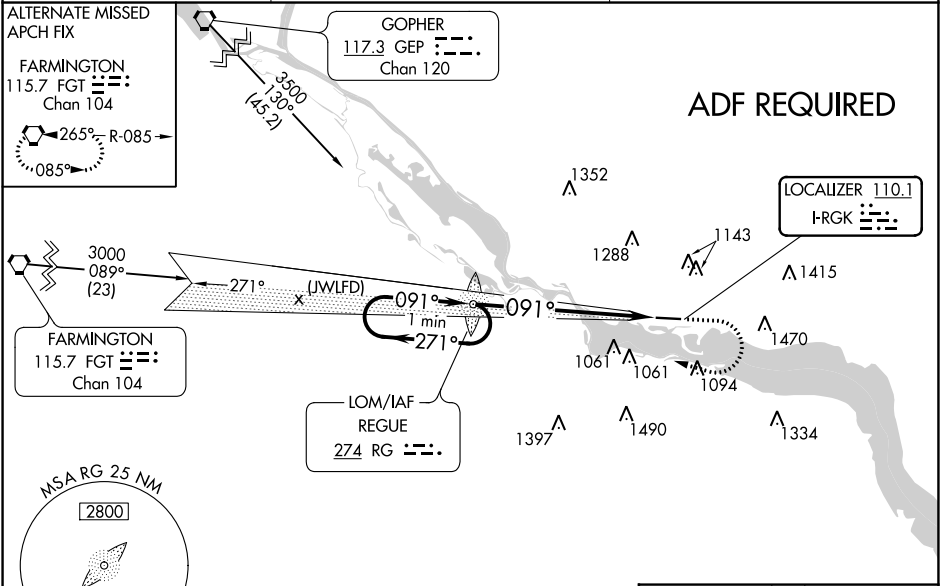

One Minute Holding Pattern

REGUE RG LOM

2000
3000
RG

3000
←271°
091°→
3000

GS 3.00°
TCH 50

2964

6.6 NM

ELEV 778
TDZE 778

091° 6.6 NM from FAF

5010 X 100

HIRL Rwy 9-27

FAF to MAP 6.6 NM

Knots	60	90	120	150	180
Min:Sec	6:36	4:24	3:18	2:38	2:12

CATEGORY	A	B	C	D
S-ILS 9	978-1/2 200 (200-1/2)			
S-LOC 9	1520-1/2 742 (800-1/2)	1520-3/4 742 (800-3/4)	1520-13/4 742 (800-13/4)	
CIRCLING	1520-1 742 (800-1)		1640-21/2 862 (900-21/2)	1780-3 1002 (1100-3)

NC-1, 23 FEB 2023 to 23 MAR 2023

NC-1, 23 FEB 2023 to 23 MAR 2023