

RNAV (GPS) RWY 18

APCH CRS	Rwy Idg	5002
177°	TDZE	19
	Arprt Elev	19

AL-98 [USN]


CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH - DME/DME RNP-0.3 NA.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5° F) or above 54° C (129° F).

MISSED APPROACH: Climb to 2000 direct TYSON and hold.

ATIS ★ 127.9 290.9	CORPUS CHRISTI APP CON 128.675 343.75	NAVY CORPUS TOWER ★ 134.85 340.2	GND CON 118.7 257.85	CLNC DEL 314.3	ASR/ PAR
-----------------------	--	-------------------------------------	-------------------------	-------------------	-------------

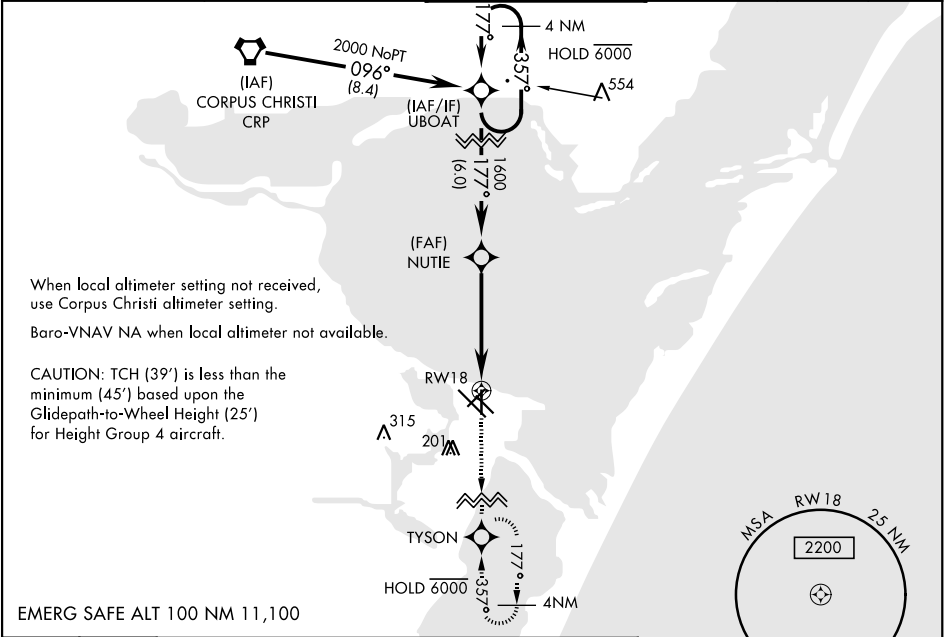

When local altimeter setting not received, use Corpus Christi altimeter setting.
Baro-VNAV NA when local altimeter not available.

CAUTION: TCH (39') is less than the minimum (45') based upon the Glidepath-to-Wheel Height (25') for Height Group 4 aircraft.

EMERG SAFE ALT 100 NM 11,100

2000

↑

TYSON

✦

VDP NA when using Corpus Christi altimeter setting.

4 NM Holding Pattern

UBOAT

← 357°

→ 177°

2000

GP 3.00° TCH 39°

NUTIE



1.0 NM to RW18

RW18

4.9 NM

1600

CATEGORY	A	B	C	D
LNAV/VNAV DA	269-¾	250	(300-¾)	276-¾ 257 (300-¾)
LNAV MDA	380-1 361 (400-1)			
 CIRCLING	480-1	461 (500-1)	540-1½ 521 (600-1½)	620-2 601 (700-2)
CORPUS CHRISTI ALTIMETER SETTING				
LNAV MDA	400-1	381 (400-1)	400-1½ 381 (400-1½)	
 CIRCLING	500-1 481 (500-1)	520-1 501 (600-1)	580-1½ 561 (600-1½)	660-2 641 (700-2)

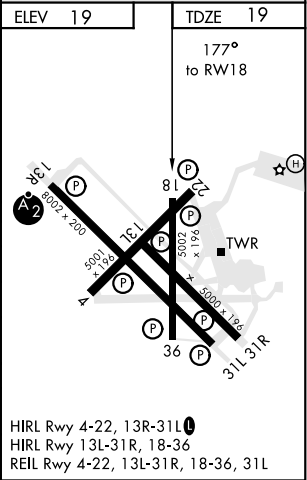

RNAV (GPS) RWY 18

SC-3, 23 MAR 2023 to 20 APR 2023

SC-3, 23 MAR 2023 to 20 APR 2023