

WAAS CH 40211 W08A	APP CRS 078°	Rwy Idg 8704 TDZE 4149 Apt Elev 4154
--	------------------------	---


RNAV (GPS) RWY 8
JOSLIN FLD/MAGIC VALLEY RGNL (TWF)

RNP APCH GPS.

- T** Circling to Rwy 30 NA at night. Baro-VNAV and VDP NA when using Jerome altimeter setting.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 48°C. When local altimeter setting not received, use Jerome altimeter setting: increase LPV DA to 4448 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 4722 feet and visibility all Cats ½ SM; increase all MDA 60 feet and visibility LNAV Cats C and D ½ SM, and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 5000 then climbing left turn to 6000 direct UYEME and hold.

ASOS 135.025	TWIN FALLS APP CON★ 126.7 353.75	TWIN FALLS TOWER★ 118.2 (CTAF) 0317.5	GND CON 121.7	CLNC DEL 123.65	UNICOM 122.95
-----------------	-------------------------------------	--	------------------	--------------------	------------------

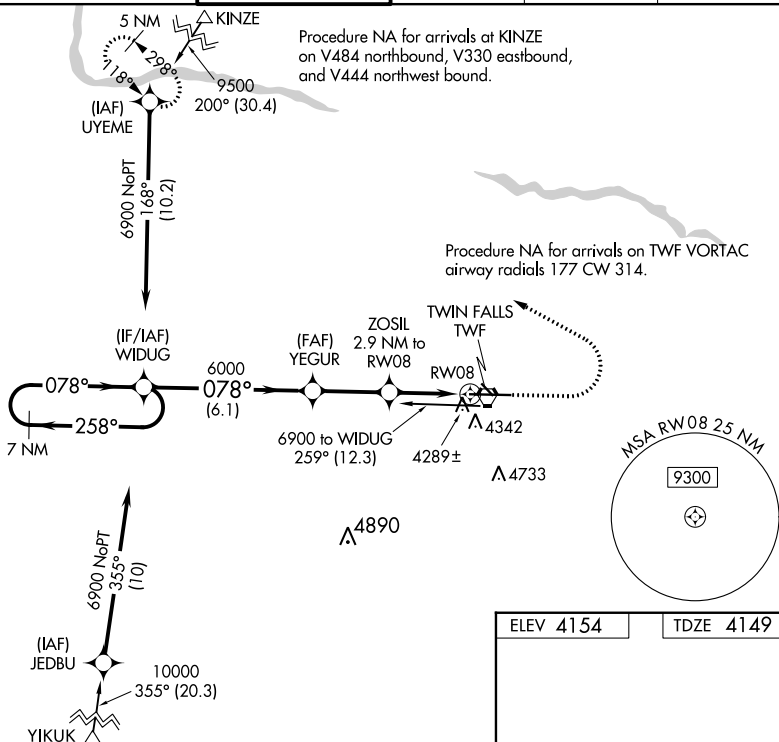

ELEV 4154

TDZE 4149

078° to RW08

31

1.3% UP

TWR 4223

30

26

A5

7 NM Holding Pattern
WIDUG
6900 ← 258°
078° →
GP 3.00° TCH 58
YEGUR 6000
ZOSIL 2.9 NM to RW08
*1.3 NM to RW08
*LNAV only
RW08
*5120
6.1 NM
2.8 NM
1.6 NM
1.3 NM

CATEGORY	A	B	C	D
LPV DA		4399-3/4	250 (300-3/4)	
LNAV/VNAV DA		4673-13/4	524 (600-13/4)	
LNAV MDA	4620-1	471 (500-1)	4620-13/8	471 (500-13/8)
C CIRCLING	4700-1 546 (600-1)	4780-1 626 (700-1)	5100-23/4 946 (1000-23/4)	5100-3 946 (1000-3)