

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>72932</b><br><b>W08A</b> | APP CRS<br><b>081°</b> | Rwy Idg<br>TDZE <b>589</b><br>Apt Elev <b>595</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 8  
SAN MARCOS RGNL (HYI)

RNP APCH.


▼

⚠

Circling NA for Cat E SW of Rwy 13-31. Rwy 8 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP NA with New Braunfels altimeter setting. When local altimeter setting not received, use New Braunfels altimeter setting and increase LPV DA to 882, LNAV/VNAV DA to 953 and increase all MDA 60 feet; increase LNAV Cat C/D/E and Circling Cat C/D visibility 1/4 SM.

MISSED APPROACH:  
Climb to 3000 direct QIMB and hold.

|                          |                                       |                                                     |                           |                            |                                                |
|--------------------------|---------------------------------------|-----------------------------------------------------|---------------------------|----------------------------|------------------------------------------------|
| ATIS ★<br><b>120.825</b> | AUSTIN APP CON<br><b>119.0 370.85</b> | SAN MARCOS TOWER★<br><b>126.825</b> (CTAF) <b>0</b> | GND CON<br><b>120.125</b> | CINC DEL<br><b>120.125</b> | CINC DEL<br><b>121.35</b><br>(when twr closed) |
|--------------------------|---------------------------------------|-----------------------------------------------------|---------------------------|----------------------------|------------------------------------------------|

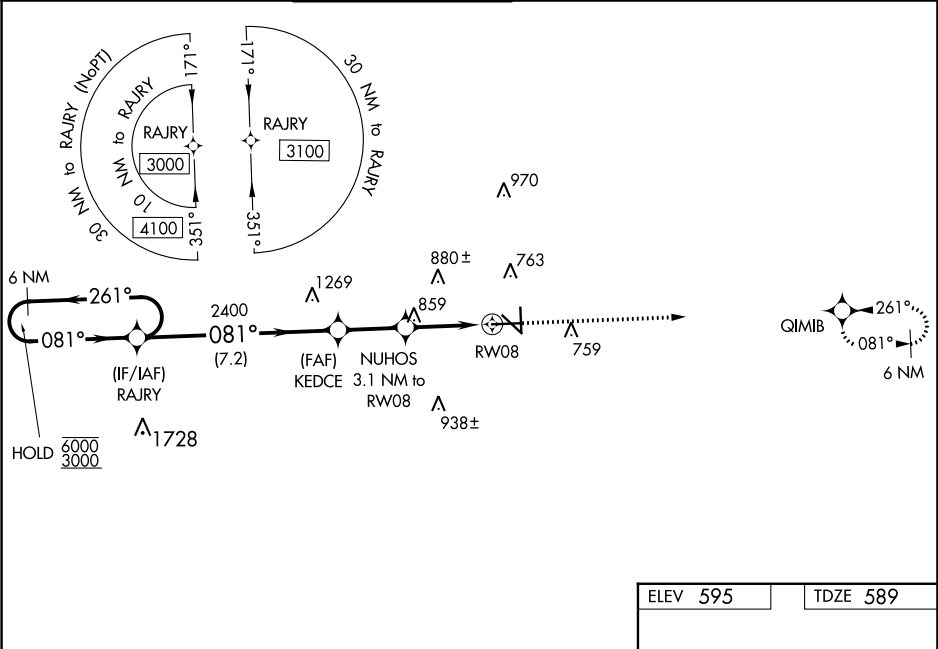

6 NM Holding Pattern

RAJRY

KEDCE

NUHOS 3.1 NM to RW08

\*1.5 NM to RW08

RW08

GP 3.00° TCH 55

\*1620

7.2 NM

2.4 NM

1.6 NM

1.5 NM

3000

QIMB

\*LNAV only.

| CATEGORY     | A                  | B                    | C                    | D                    | E |
|--------------|--------------------|----------------------|----------------------|----------------------|---|
| LPV DA       | 839-1 250 (300-1)  |                      |                      |                      |   |
| LNAV/VNAV DA | 910-1 321 (400-1)  |                      |                      |                      |   |
| LNAV MDA     | 1120-1 531 (600-1) | 1120-1½ 531 (600-1½) |                      |                      |   |
| CIRCLING     | 1120-1 525 (600-1) | 1240-1¾ 645 (700-1¾) | 1320-2¼ 725 (800-2¼) | 1340-2¾ 745 (800-2¾) |   |

ELEV 595 TDZE 589

QIMB

RAJRY

KEDCE

NUHOS

RW08

TWR

MIRL Rwy 8-26, 13-31, and 17-35

REIL Rwy 8 and 26

SC-3, 18 MAY 2023 to 15 JUN 2023

SC-3, 18 MAY 2023 to 15 JUN 2023