

WAAS CH 90215 W03A	APP CRS 038°	Rwy Idg TDZE 3652 Apt Elev 3661
--	------------------------	---



RNAV (GPS) RWY 3
LEA COUNTY RGNL (HOB)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 52°C (126°F). DME/DME-RNP-0.3 NA. When local altimeter setting not received, use Carlsbad altimeter setting and increase all DA 281 feet and all MDA 300 feet, increase LPV and LNAV/VNAV all Cats visibility ½ mile, LNAV Cats C/D visibility ⅔ mile, Circling Cat C visibility ¾ mile, and Circling Cat D visibility ½ mile. Baro-VNAV and VDP NA when using Carlsbad altimeter setting. Inoperative table does not apply to LPV and LNAV/VNAV. For inoperative MALSR increase LNAV Cats C/D visibility to 1 mile. For inoperative MALSR when using Carlsbad altimeter setting, increase LPV and LNAV/VNAV all Cats visibility to 1¼ miles, and LNAV Cats C/D to 1⅔ miles. Rwy 17 helicopter visibility reduction below 1 SM NA. Circling Rwy 17 NA at night.

MALSR

MISSED APPROACH:
Climb to 6000 direct DEKEC and hold.

ATIS 119.75	FORT WORTH CENTER 133.1 298.95	HOBBS TOWER * 120.65 (CTAF) 317.4	GND CON 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

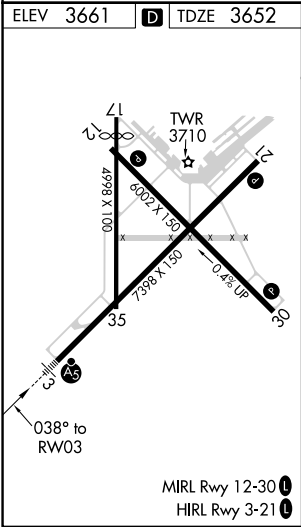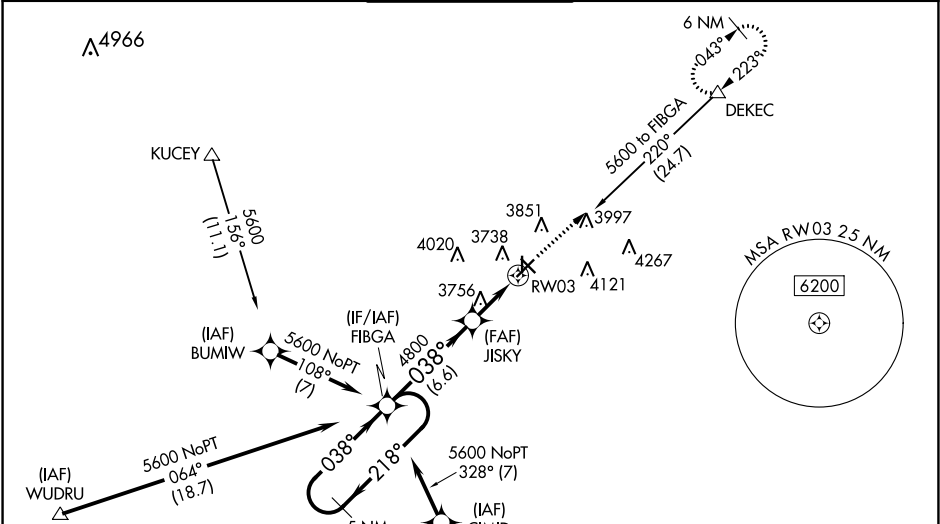

5 NM Holding Pattern				
FIBGA				
5600 ← 218° → 038° →				
GP 3.00° TCH 48				
JISKY 4800				
*1 NM to RW03 *LNAV only.				
RW03				
6.6 NM 2.5 NM 1 NM				
CATEGORY	A	B	C	D
LPV DA	3902-¾ 250 (300-¾)			
LNAV/VNAV DA	3902-¾ 250 (300-¾)			
LNAV MDA	4020-½ 368 (400-½)		4020-⅝ 368 (400-⅝)	
CIRCLING	4120-1 459 (500-1)	4160-1 499 (500-1)	4440-2¼ 779 (800-2¼)	4440-2½ 779 (800-2½)

SW-1, 18 MAY 2023 to 15 JUN 2023

SW-1, 18 MAY 2023 to 15 JUN 2023