


WAAS CH 78135 W18A	APP CRS 179°	Rwy Idg TDZE Apt Elev	6000 1350 1350
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

FRENCH VALLEY (F70)

▼ NA DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA with Ramona altimeter setting. Circling NA west of Rwy 18-36. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received use Ramona altimeter setting: increase LPV DA to 1685 feet and all visibilities ¼ mile, LNAV/VNAV DA to 1955 feet and all visibilities ¾ mile, all MDA 80 feet and LNAV visibility Cat B ¼ mile, Cat C ½ mile, and Circling visibility Cat C ¼ mile. Helicopter visibility reduction below ¾ SM NA.	MISSED APPROACH: Climb to 2500 then climbing right turn to 5000 direct JESEX and hold.
---	--

AWOS-3 119.025	MARCH APP CON* 133.5 306.975	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

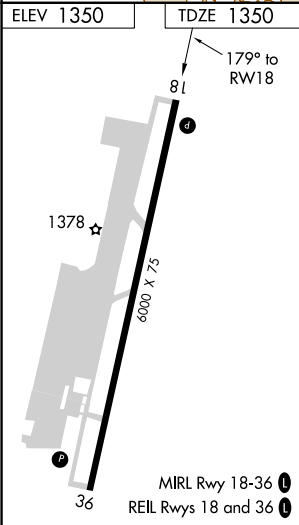

ELEV 1350	TDZE 1350
179° to RW18	81
1378	6000 x 75
36	MIRL Rwy 18-36
REIL Rwys 18 and 36	
2500	5000
JESEX	△
* LNAV only	
DISEY 3.8 NM to RW18	DANNIN 3500
* 1.2 NM to RW18	
RW18	2600*
ECULU	3800
TIQMU	4600
5 NM Holding Pattern	
GP 3.00°	TCH 40
1.2 NM	2.6 NM
2.8 NM	2.2 NM
5.1 NM	
CATEGORY	A
LPV DA	1600-7/8
LNAV/VNAV DA	1871-13/4
LNAV MDA	1780-1
CIRCLING	2020-1
250 (300-7/8)	250 (300-7/8)
521 (600-13/4)	521 (600-13/4)
430 (500-1)	430 (500-1)
670 (700-1)	670 (700-1)
1780-1 1/4	1780-1 1/4
2060-2	2060-2
710 (800-2)	710 (800-2)
NA	NA