


WAAS CH 99330 W16A	APP CRS 158°	Rwy Idg 4800 TDZE 213 Apt Elev 213
--	------------------------	---

RNAV (GPS) RWY 16
TRENTON MERCER (TTN)


MISSED APPROACH:
Climb to 1500 then
climbing right turn to
2700 direct ZUBAX
and hold.

Night Landing: Rwy 34 operational VGSi required, remain on or above VGSi glidepath until threshold.
 Baro-VNAV NA when using Northeast Philadelphia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-3 NA.
 Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received use Northeast Philadelphia altimeter setting; increase LPV DA to 510 feet and all Cats visibility ½ SM, LNAV/VNAV DA to 576 feet; increase all MDA 60 feet and LNAV Cat C/D visibility ½ SM and Circling Cat C visibility ¼ SM.

ATIS	PHILADELPHIA	APP CON	TRENTON TOWER ★	GND CON	CLNC DEL	UNICOM
126.775	123.8	291.7	120.7 (CTAF) 0 257.8	121.9 257.8	121.9 257.8	122.95

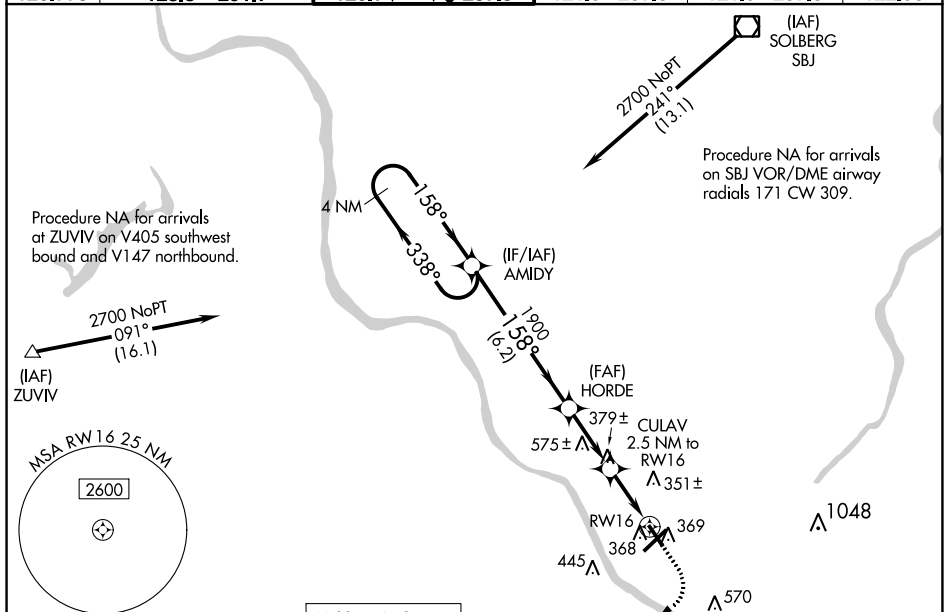

ELEV 213	D	TDZE 213
----------	----------	----------

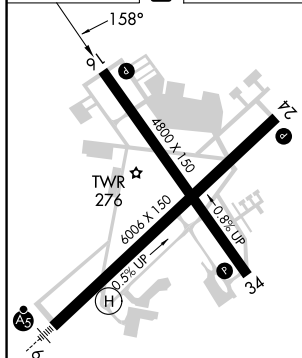

HIRL Rwy 6-24 and 16-34 **L**
REIL Rwy 16, 24 and 34 **L**

TRENTON, NEW JERSEY
Orig-C 23APR20


MISSED APCH FIX

ZUBAX

058°

238°

4 NM

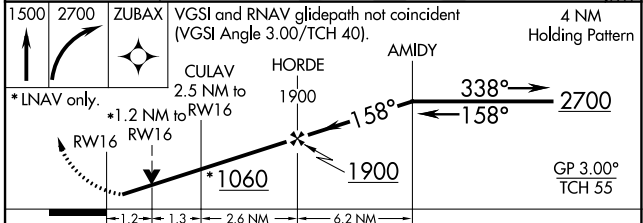

CATEGORY	A	B	C	D
LPV DA	463-3/4 250 (300-3/4)			
LNNAV/ VNAV DA	529-1 316 (400-1)			
LNNAV MDA	640-1	427 (500-1)	640-1 1/4	427 (500-1 1/4)
C CIRCLING	680-1	467 (500-1)	760-1 1/2 547 (600-1 1/2)	960-2 1/2 747 (800-2 1/2)

TRENTON MERCER (TTN)

RNAV (GPS) RWY 16