

| | | |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS CH 50312 W35A | APP CRS 347° | Rwy ldg 5002 TDZE 295 Apt Elev 295 |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 35




TACOMA NARROWS (TIW)

RNP APCH.


▼ Baro-VNAV NA when using McChord Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). Circling NA east of Rwy 17-35. When local altimeter setting not received, use McChord Fld altimeter setting and increase all DA 25 feet and all MDA 40 feet.

MISSED APPROACH: Climb to 4000 direct ECAZA and left turn via 230° track to CARRO and hold, continue climb-in-hold to 4000.

| | | | | |
|-----------------------|---------------------------------------|-----------------------------------------------|-------------------------|-------------------------|
| ATIS 124.05 | SEATTLE APP CON 120.1 290.9 | TACOMA TOWER ★ 118.5 (CTAF) 0 253.5 | GND CON 121.8 | UNICOM 122.95 |
|-----------------------|---------------------------------------|-----------------------------------------------|-------------------------|-------------------------|

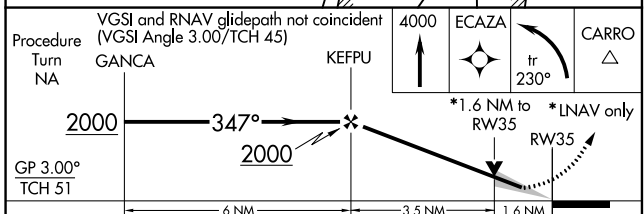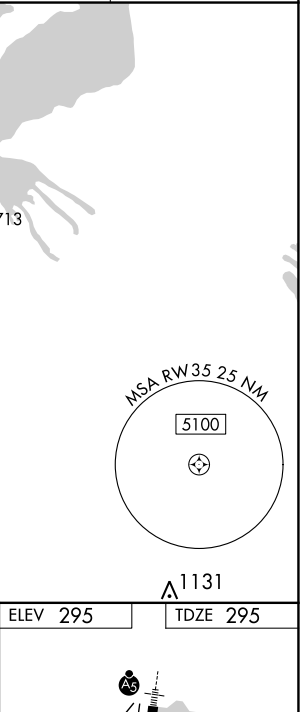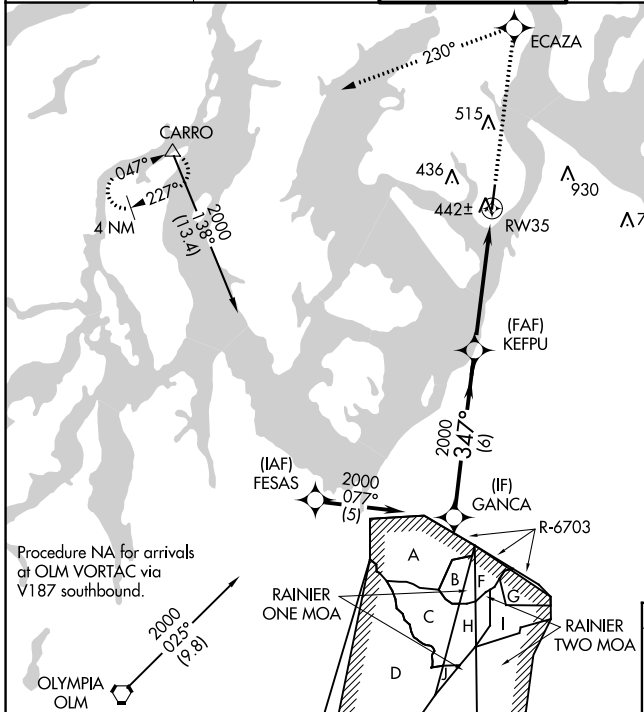

| CATEGORY | A | B | C | D |
|--------------|---------------------------|---------------------------|---------------------------|---|
| LPV DA | 561-7/8 266 (300-7/8) | | | |
| LNAV/VNAV DA | 769-1 3/4 474 (500-1 3/4) | | | |
| LNAV MDA | 840-1 545 (600-1) | 840-1 1/2 545 (600-1 1/2) | 840-1 3/4 545 (600-1 3/4) | |
| CIRCLING | 980-1 685 (700-1) | 980-2 685 (700-2) | 980-2 1/4 685 (700-2 1/4) | |

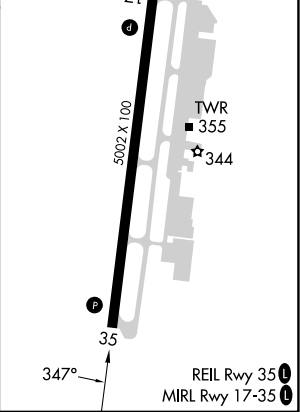

NW-1, 07 SEP 2023 to 05 OCT 2023

NW-1, 07 SEP 2023 to 05 OCT 2023