

APP CRS	Rwy Idg	3300
032°	TDZE	30
	Apt Elev	30

RNAV (GPS) RWY 2

PERRYVILLE (PEV) (PAPE)

RNP APCH - GPS.


▼

NA

Rwy 2 helicopter visibility reduction below 1 SM NA. Procedure NA at night. Use Chignik altimeter setting; when not received, use Sand Point altimeter setting and increase all MDAs 60 feet.

MISSED APPROACH: (Do not exceed 230K until completion of climbing right turn) Climbing right turn to 9000 direct ZOLOP and on track 249° to GESSE, continue climb-in-hold to 9000. *Missed approach requires minimum climb of 418' per NM to 2400.

AWOS-3PT 118.1	AJC/PAJC AWOS-3P 135.75	ANCHORAGE CENTER 125.35 346.3	CTAF 122.90
-------------------	----------------------------	----------------------------------	----------------

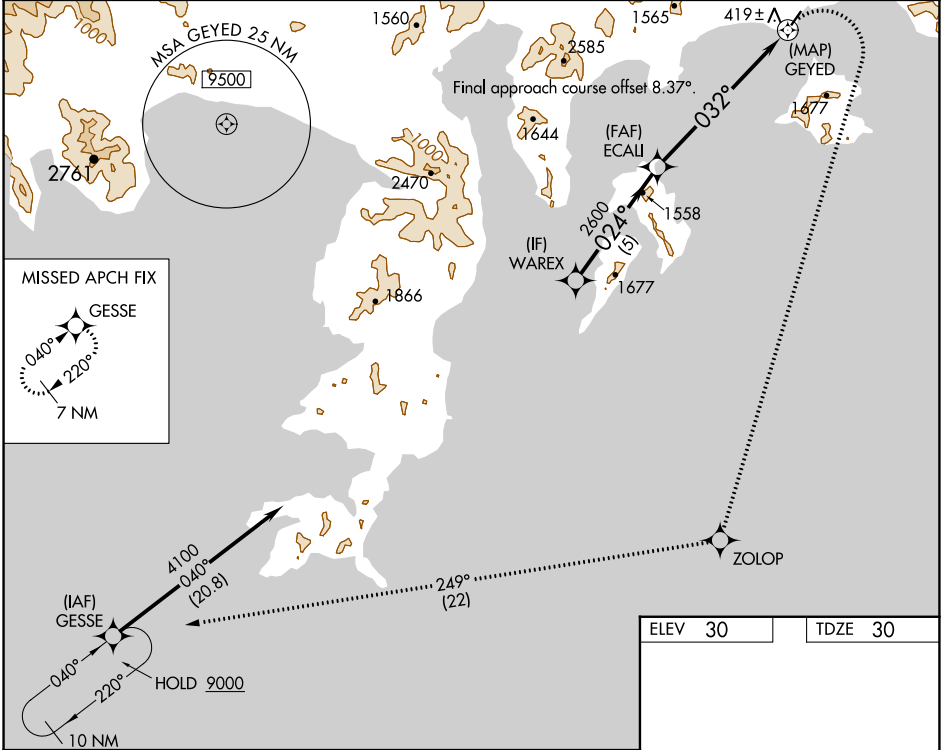

WAREX

ECAU

GEYED

4100

2600

024°

032°

3.43°

TCH 28

5 NM

6.8 NM

0.2

CATEGORY

A

B

C

D

LNAV MDA*

1360-1¼

1330 (1400-1¼)

1360-1½

1330 (1400-1½)

1360-3

1330 (1400-3)

LNAV MDA

2080-1¼

2050 (2100-1¼)

2080-1½

2050 (2100-1½)

2080-3

2050 (2100-3)

CIRCLING

2080-1¼

2050 (2100-1¼)

2080-1½

2050 (2100-1½)

2160-3

2130 (2200-3)

NA

ELEV 30

TDZE 30

MIRL Rwy 2-20

REIL Rwy 2

3000 X 75