


AWOS-3PT  
119.425  
CTAF  
122.9  
DENVER CENTER  
120.475 235.975

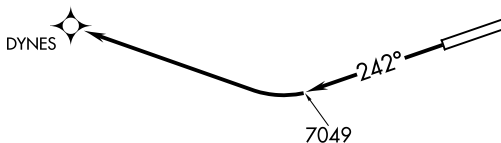

NOTE: RNAV 1.  
NOTE: GPS required.

TAKEOFF MINIMUMS

Rwy 24: 300-13/4 or standard with minimum climb of 228' per NM to 6800, or alternatively with standard takeoff minimums and a normal 200' per NM climb gradient. Takeoff must occur no later than 1800' prior to DER.

TAKEOFF OBSTACLE NOTES

- Rwy 24: Vehicle on road, 11' from DER, 289' left of centerline, 6489' MSL.
- REILS 26' from DER, 113' left and right of centerline, 6475' MSL.
- Sign, buildings, fence and vehicle on road beginning 63' from DER, 291' left of centerline, up to 32' AGL/6507' MSL.
- Vehicle on road beginning 77' from DER, 301' right of centerline, up to 6479' MSL.
- Transmission line towers beginning 410' from DER, 309' left of centerline, up to 41' AGL/6509' MSL.
- Vehicle on road on ridgeline beginning 1.3 NM from DER, 2528' left of centerline, up to 6703' MSL.
- Tree on ridgeline 1.3 NM from DER, 2441' left of centerline, 6688' MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 24: Climb heading 242° to 7049, then right turn direct DYNES, thence. . . .

. . . .expect filed altitude 10 minutes after departure.