

WAAS CH 61311 W04A	APP CRS 043°	Rwy Idg 4974 TDZE 24 Apt Elev 24
--	------------------------	---



RNAV (GPS) RWY 4

VERO BEACH RGNL (VRB)

▼ Circling to Rwy 30R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Pierce altimeter setting and increase LPV DA to 320 feet; increase LNAV/VNAV DA to 378 feet and all visibilities $\frac{1}{8}$ SM; increase all MDAs 40 feet and LNAV Cat C/D and Circling Cat C/D visibility $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Fort Pierce altimeter setting. Rwy 4 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 2000 direct
OJEMY and hold.

ATIS 120.575	PALM BEACH APP CON 123.625 225.4 (N)	VERO BEACH TOWER ★ 126.3 (CTAF) 0	GND CON 127.45	CLNC DEL 134.975	UNICOM 122.95
-----------------	---	--------------------------------------	-------------------	---------------------	------------------

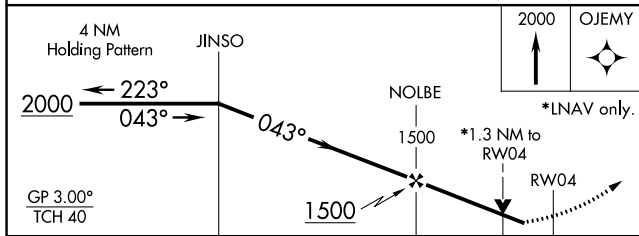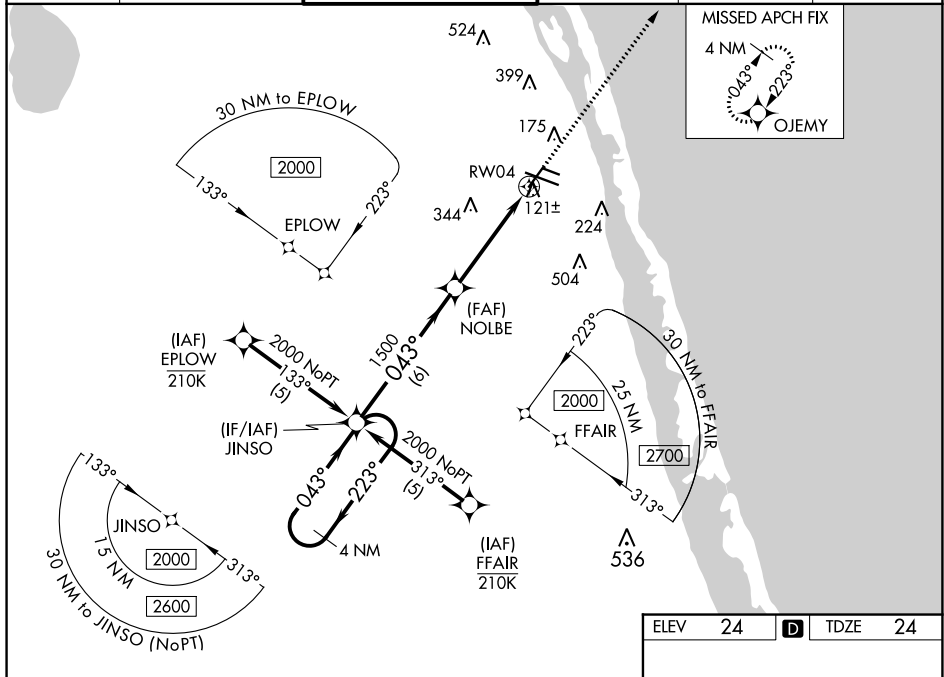

CATEGORY		A		B		C		D	
LPV	DA	297-7 $\frac{7}{8}$		273 (300-7%)					
INAV/ VNAV	DA	355-1 $\frac{1}{8}$		331 (400-1%)					
INAV	MDA	480-1	456 (500-1)			480-1 $\frac{1}{8}$	456 (500-1 $\frac{1}{8}$)		
CIRCLING		560-1	536 (600-1)			660-1 $\frac{1}{4}$ 636 (700-1 $\frac{1}{4}$)	820-2 $\frac{1}{2}$ 796 (800-2 $\frac{1}{2}$)		

